

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 95TRACYLED42

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	42	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 300 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	40,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,379 0,382	
Parameters for directional light sources:				
Peak luminous intensity (cd)	455	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	15	Survival factor	0,60	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,95	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

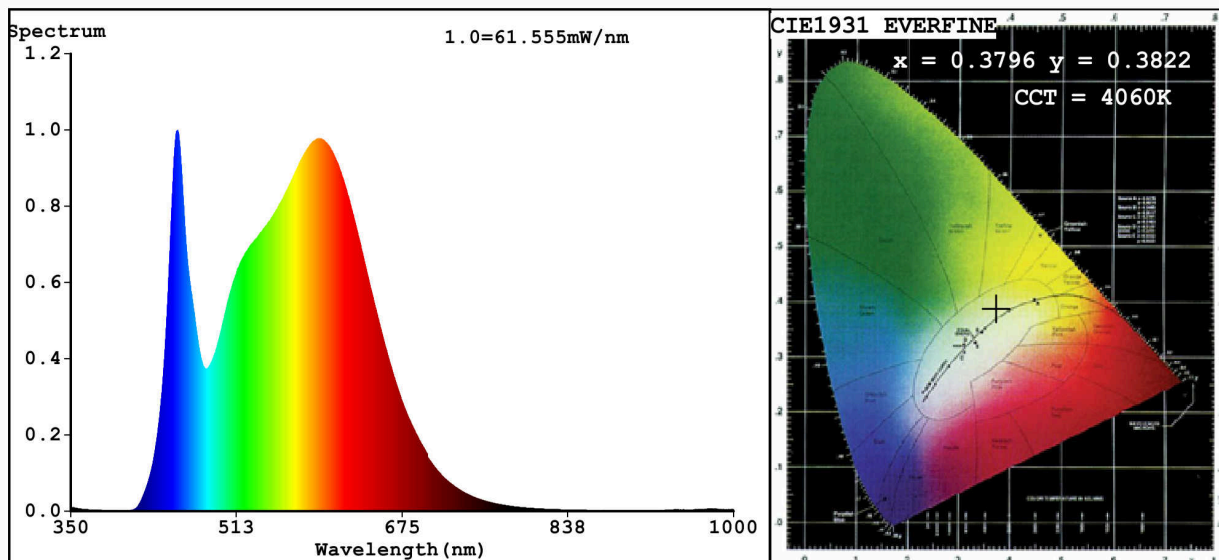

Color Parameters:

Chromaticity Coordinate: $x=0.3796$ $y=0.3822$ $u'=0.2224$ $v'=0.5038$

CCT=4060K(Duv=0.0028) Dominant WL:Ld =577.4nm Purity=28.6%

Ratio:R=18.2% G=77.7% B=4.1%; Peak WL:Lp=455.0nm FWHM=27.9nm

Render Index:Ra=84.7

R1 =83	R2 =92	R3 =97	R4 =82	R5 =83	R6 =89	R7 =86
R8 =66	R9 =15	R10=81	R11=81	R12=64	R13=86	R14=99 R15=77

Photo Parameters:

Flux = 3511 lm Eff. : 86.20 lm/W Fe = 10.83 W

Electrical parameters:

V = 239.84 V I = 0.1787 A P = 40.73 W PF = 0.9505

WHITE:ANSI_4000K

Status: Integral T = 11 ms Ip = 42352 (65%)

Model:TRACY SUPER SLIM/42W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:95TRACYLED42
Date:2018-09-26 13:01
Humidity:65.0%
Remarks:SH18BG-JC-ELM01-1_4872