

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 96GRF52/76022W

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	506 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	7,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	90	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	180	
	Depth	150	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,439 0,400
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	607	Beam angle in degrees, or the range of beam angles that can be set	40
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	3	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

# Lightsource Test Report


## Product Information

Product Category: 52  
Submitted Unit: T

Product Number: JD-CD75C02

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4393$   $y=0.4001$   $u(u')=0.2538$   $v=0.3468$   $v'=0.5202$   
CCT:  $T_c=2928K$  ( $duv=-0.00188$ ) Color Ratio:  $R=0.235$   $G=0.737$   $B=0.028$   
Peak Wavelength: 602nm Half Bandwidth: 114.6nm  
Dominant Wavelength: 583.8nm Color Purity: 0.520  
CRI:  $R_i$ :  $R_a=82.2$   
 $R1=81$   $R2=93$   $R3=94$   $R4=80$   $R5=83$   $R6=92$   $R7=79$   $R8=56$   
 $R9=3$   $R10=84$   $R11=80$   $R12=76$   $R13=84$   $R14=97$   $R15=73$

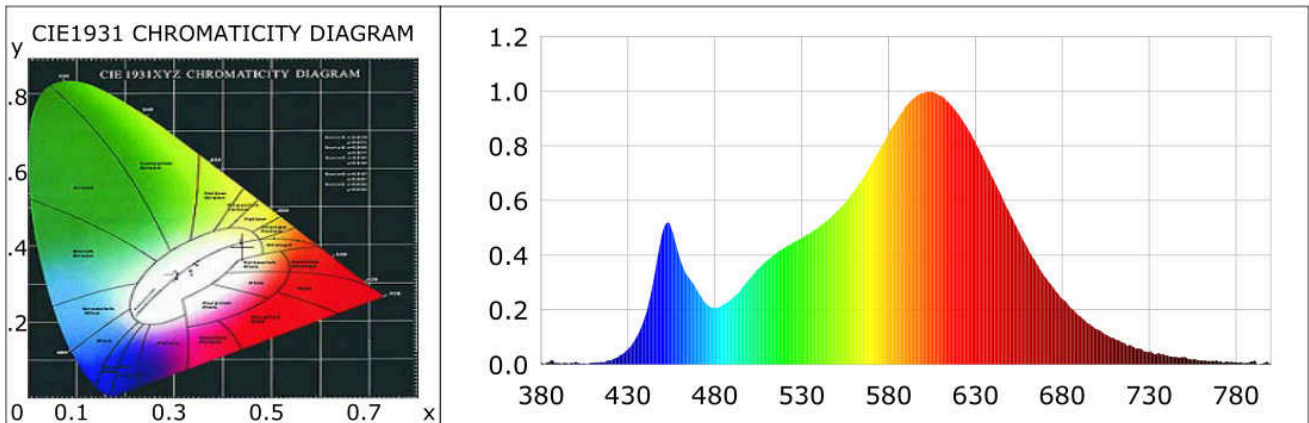

## Photometric Parameters

Luminous Flux: 506.7 lm Efficiency: 68.90 lm/W Radiant Power: 1.382 W

## Electric Parameters

Voltage: 220.00V Current: 0.0605A Power: 7.35W  
Power Factor: 0.5520 Frequency: 49.99Hz

## Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer  
Stabilization Time: 0 Min Photometric Condition: Sphere diameter: 1.50m, 4π  
Max of Signal: 44765 (3641) CCD Integration Time: 1097.92 ms

Condition:  $T_x:26.8^{\circ}C$ ,  $T_i:27.3^{\circ}C$ , R.H.:60%  
Test Lab:  
Operator:

Test Device: Inventfine CMS-2  
Test Time: 2022-07-09 12:16:54  
Inspector: