

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 96GRF53/156022W

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	14,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	90	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	200	
	Depth	200	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,434 0,397
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	467	Beam angle in degrees, or the range of beam angles that can be set	90
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	13	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

# Lightsource Test Report

## Product Information

Product Category: 52  
Submitted Unit: T

Product Number: JD-CD100C01

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4340$   $y=0.3970$   $u(u')=0.2518$   $v=0.3454$   $v'=0.5181$

CCT:  $T_c=2961K$  ( $duv=-0.00246$ )

Color Ratio: R=0.234 G=0.738 B=0.029

Peak Wavelength: 606nm

Half Bandwidth: 125.2nm

Dominant Wavelength: 583.8nm

Color Purity: 0.494

CRI: Ri: Ra= 81.9

R1 =83

R2 =94

R3 =94

R4 =82

R5 =84

R6 =93

R7 =81

R8 =60

R9 =13

R10=85


R11=81

R12=75

R13=86

R14=98

R15=76

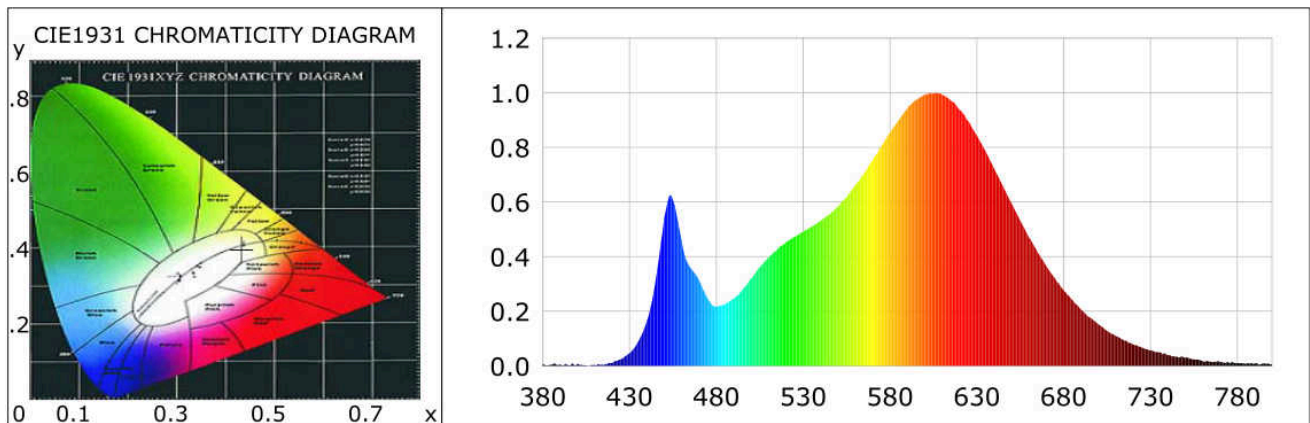

## Photometric Parameters

Luminous Flux: 923.7 lm

Efficiency: 66.32 lm/W

Radiant Power: 3.186 W

## Electric Parameters

Voltage: 220.00V

Current: 0.1130A

Power: 13.92W

Power Factor: 0.5560

Frequency: 49.99Hz

## Test Information

Scan Range: 380nm~800nm:1nm Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 Min

Photometric Condition: Sphere diameter: 1.50m, 4 $\pi$

Max of Signal: 43654 (3563)

CCD Integration Time: 482.75 ms

Condition: Tx:28.0'C, Ti:27.6'C, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2

Test Time: 2022-07-09 11:36:21

Inspector: