

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 96LEDW157

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	9,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,384 0,383	
Parameters for directional light sources:				
Peak luminous intensity (cd)	443	Beam angle in degrees, or the range of beam angles that can be set	60	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	15	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

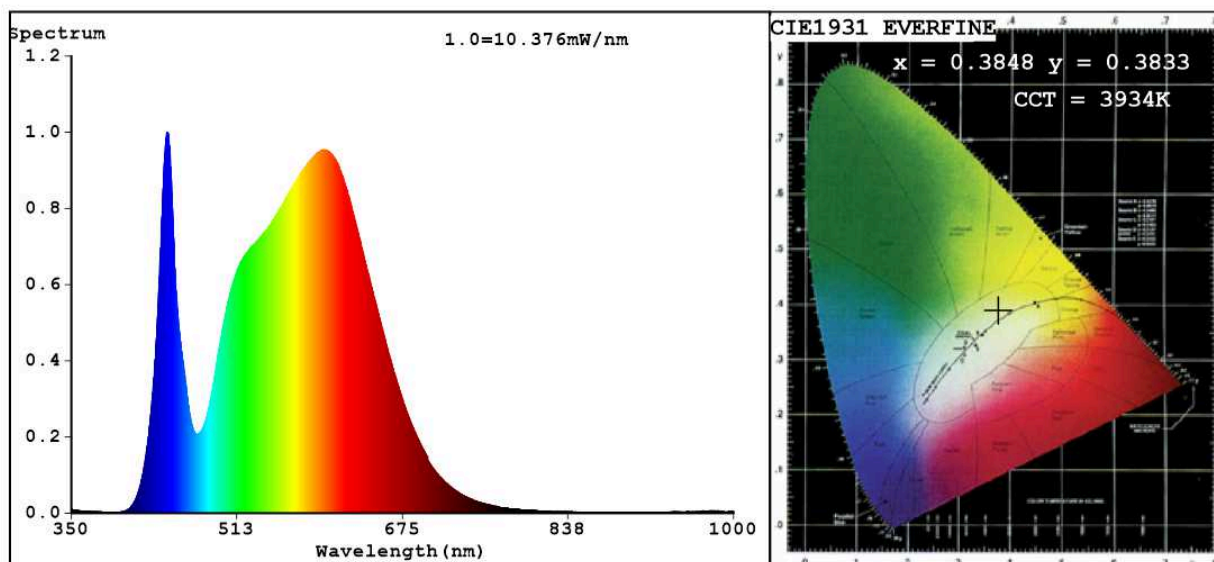

Color Parameters:

Chromaticity Coordinate: $x=0.3848$ $y=0.3833$ $u'=0.2253$ $v'=0.5051$

CCT=3934K (Duv=0.0018) Dominant WL: $\lambda_d = 578.4$ nm Purity=30.5%

Ratio: R=18.6% G=78.2% B=3.2%; Peak WL: $\lambda_p = 443.8$ nm FWHM=20.8 nm

Render Index: $R_a = 83.6$

R1 = 82	R2 = 87	R3 = 93	R4 = 85	R5 = 83	R6 = 84	R7 = 87
R8 = 68	R9 = 15	R10 = 71	R11 = 86	R12 = 69	R13 = 83	R14 = 96
						R15 = 76

Photo Parameters:

Flux = 580.3 lm Eff. : 62.45 lm/W $\eta_e = 1.789$ W

Electrical parameters:

V = 229.97 V I = 0.04787 A P = 9.292 W PF = 0.8441

WHITE: ANSI_4000K

Status: Integral T = 79 ms $I_p = 49448$ (75%)

Model: GRF157 LED/10W
Tester: Petya Marinova
Temperature: 25.3 Deg
Manufacturer: ELMARK

Number: 96LEDW157
Date: 2018-12-18 16:22
Humidity: 65.0%
Remarks: ESPL20181009_5143