

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 98HELIOS30SEN

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	5 000
On-mode power (P_{on}), expressed in W	30,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	75
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,321 0,349	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 026	Beam angle in degrees, or the range of beam angles that can be set	98	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

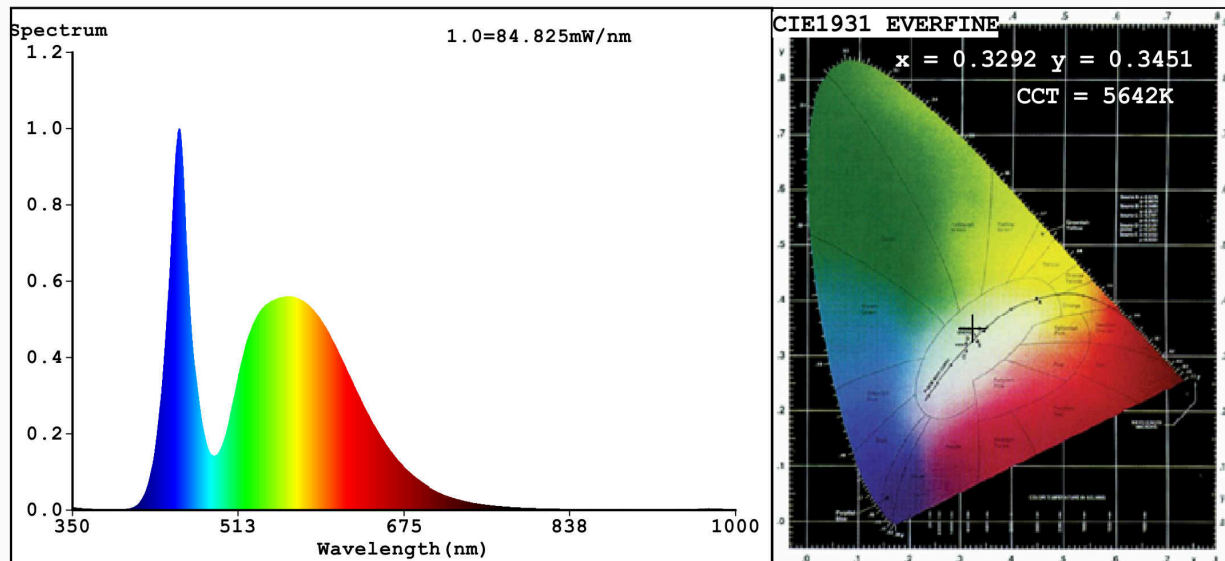

Color Parameters:

Chromaticity Coordinate: $x=0.3292$ $y=0.3451$ $u'=0.2032$ $v'=0.4791$
 CCT=5642K (Duv=0.0035) Dominant WL: $\lambda_d = 532.1\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=2.5%
 Ratio: R=13.4% G=82.4% B=4.1%; Peak WL: $\lambda_p = 454.7\text{nm}$ FWHM=23.1nm
 Render Index: $R_a = 75.3$

R1 =73	R2 =81	R3 =84	R4 =74	R5 =73	R6 =72	R7 =85
R8 =61	R9 =0	R10=52	R11=69	R12=43	R13=74	R14=91 R15=69

Photo Parameters:

Flux = 2870 lm Eff. : 98.09 lm/W $\Phi_e = 8.836\text{ W}$

Electrical parameters:

V = 229.96 V I = 0.1341 A P = 29.26 W PF = 0.9489

WHITE: ANSI_5700K

Status: Integral T = 12 ms $I_p = 49839$ (76%)

Model: HELIOS SMD/30W
 Tester: Petya Marinova
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 98HELIOS30SEN
 Date: 2019-07-31 15:51:15
 Humidity: 65.0%
 Remarks: 019V007B_5765