

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 98HELIOS50/WHE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	49,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	79
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,383 0,391	
Parameters for directional light sources:				
Peak luminous intensity (cd)	589	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

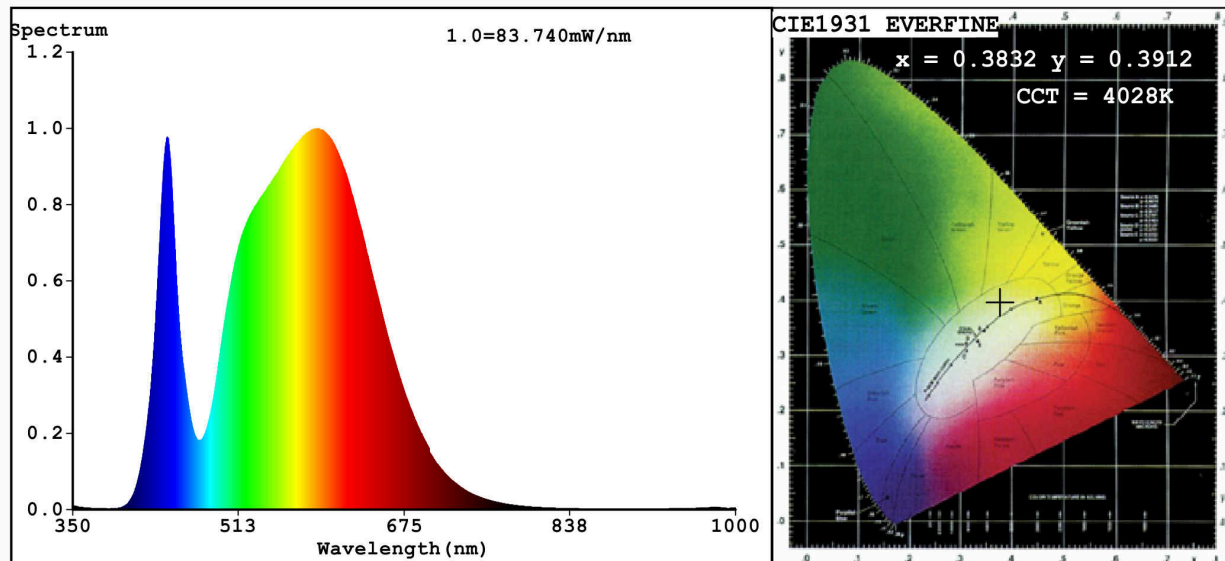

Color Parameters:

Chromaticity Coordinate: $x=0.3832$ $y=0.3912$ $u'=0.2213$ $v'=0.5082$
 CCT=4028K (Duv=0.0058) Dominant WL: $\lambda_d = 576.2\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=32.4%
 Ratio: R=17.5% G=79.6% B=2.8% ; Peak WL: $\lambda_p = 589.8\text{nm}$ FWHM=155.7nm
 Render Index: $R_a = 79.8$

R1 =78	R2 =83	R3 =89	R4 =82	R5 =78	R6 =78	R7 =86
R8 =65	R9 =4	R10=61	R11=81	R12=61	R13=78	R14=94
						R15=71

Photo Parameters:

Flux = 5081 lm Eff. : 103.47 lm/W $\Phi_e = 15.39\text{ W}$

Electrical parameters:

V = 219.82 V I = 0.2293 A P = 49.11 W PF = 0.9744
 WHITE:ANSI_4000K

Status: Integral T = 12 ms $I_p = 51528$ (79%)

Model:LED FLOODLING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:98HELIOS50/WH
 Date:2020-12-14 11:25:23
 Humidity:65.0%
 Remarks:6944