

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 98SIRIUS100SMD

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	100	Energy efficiency class	D
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	11 667 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P_{on}), expressed in W	98,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,317 0,344	
Parameters for directional light sources:				
Peak luminous intensity (cd)	449	Beam angle in degrees, or the range of beam angles that can be set	110	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

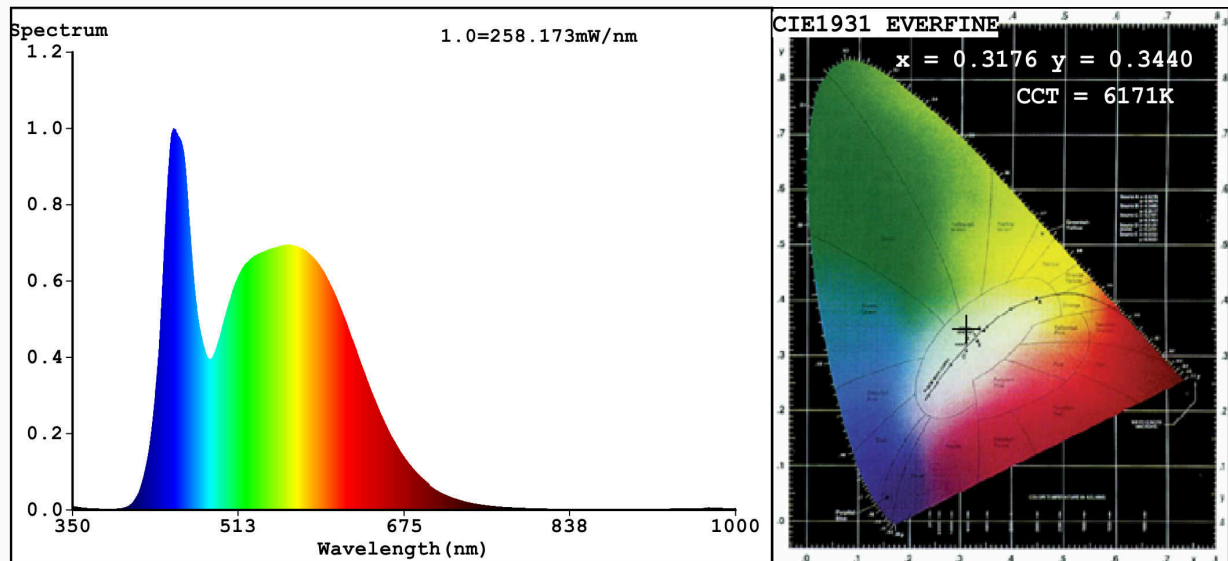

Color Parameters:

Chromaticity Coordinate: $x=0.3176$ $y=0.3440$ $u'=0.1957$ $v'=0.4768$
 CCT=6171K (Duv=0.0083) Dominant WL: $\lambda_d = 500.7nm$ WL: $\lambda_c = --nm$ Purity=4.8%
 Ratio: R=13.2% G=81.2% B=5.6% ; Peak WL: $\lambda_p = 449.2nm$ FWHM=36.8nm
 Render Index: $R_a = 82.2$

R1 =79	R2 =87	R3 =93	R4 =81	R5 =80	R6 =83	R7 =88
R8 =66	R9 =0	R10=70	R11=79	R12=63	R13=81	R14=97 R15=72

Photo Parameters:

Flux = 11667 lm Eff. : 118.03 lm/W $\Phi_e = 37.08 W$

Electrical parameters:

V = 219.88 V I = 0.4777 A P = 98.85 W PF = 0.9410

WHITE: ANSI_6500K

Status: Integral T = 4 ms $I_p = 45682$ (70%)

Model: LED FLOODLIGHT
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 98SIRIUS100SMD
 Date: 2020-10-08 15:10:55
 Humidity: 65.0%
 Remarks: 6856