

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 98SIRIUS50SMD

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	D
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	6 000 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power ( $P_{on}$ ), expressed in W	49,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,316 0,343
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	445		Beam angle in degrees, or the range of beam angles that can be set	110
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0		Survival factor	0,50
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90		Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

### Spectrum Test Report

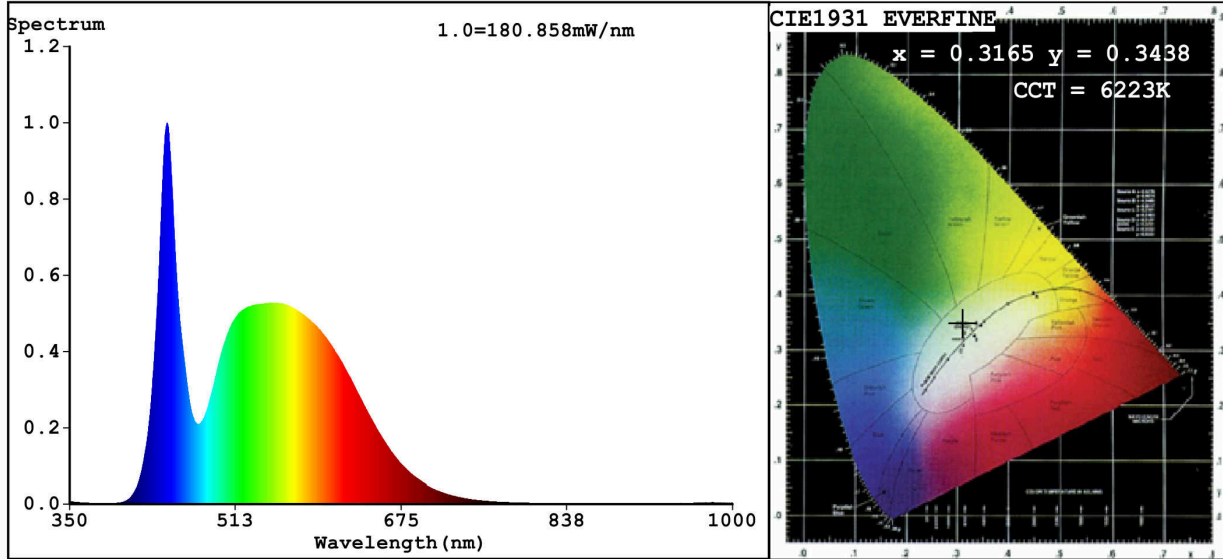

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3165$   $y=0.3438$  /  $u'=0.1950$   $v'=0.4766$   
 CCT=6223K (Duv=0.0087) Dominant WL:Ld =499.9nm WL:Lc = --nm Purity=5.2%  
 Ratio:R=13.0% G=82.0% B=4.9%; Peak WL:Lp=445.8nm FWHM=22.1nm  
 Render Index:Ra=80.3

R1 =77    R2 =83    R3 =88    R4 =81    R5 =79    R6 =79    R7 =86  
 R8 =68    R9 =0    R10=61    R11=81    R12=62    R13=78    R14=94    R15=71

**Photo Parameters:**

Flux = 6146 lm    Eff. : 125.37 lm/W    Fe = 19.50 W

**Electrical parameters:**

V = 219.96 V    I = 0.2353 A    P = 49.03 W PF = 0.9473

WHITE:ANSI\_6500K

Status: Integral T = 7 ms    Ip = 54556 (83%)

Model:LED FLOODLIGHT  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:98SIRIUS50SMD  
 Date:2020-10-08 15:32:28  
 Humidity:65.0%  
 Remarks:6856