

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 98VECA200SMD

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	200	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	21 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	5 500
On-mode power (P_{on}), expressed in W	182,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	75
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,327 0,339	
Parameters for directional light sources:				
Peak luminous intensity (cd)	448	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

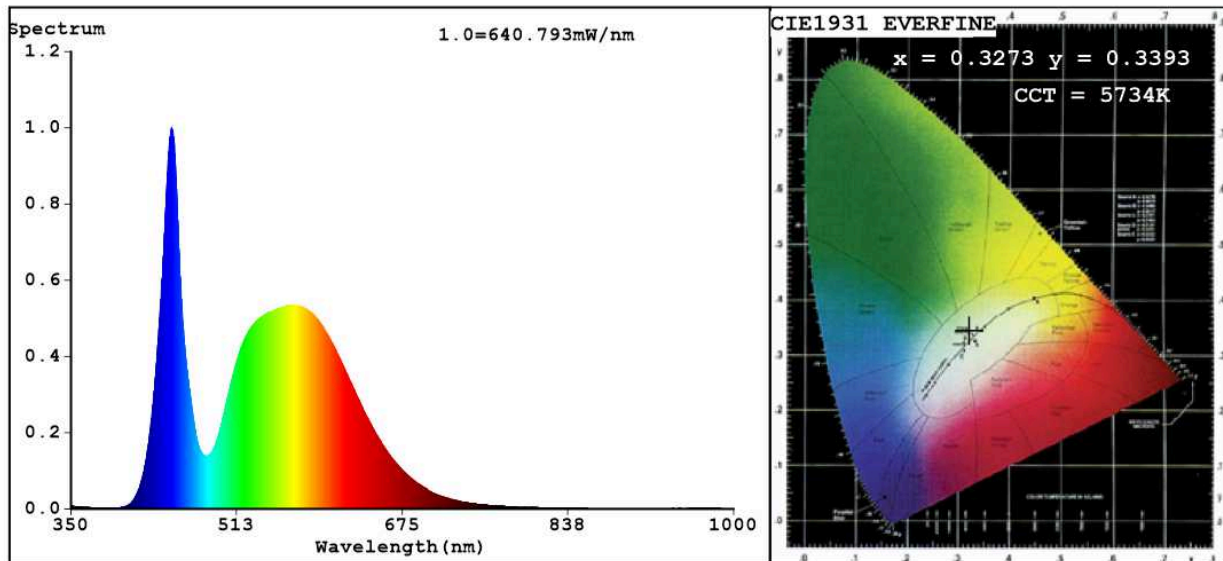

Color Parameters:

Chromaticity Coordinate: $x=0.3273$ $y=0.3393$ / $u'=0.2040$ $v'=0.4759$
 CCT=5734K (Duv=0.0014) Dominant WL: $\lambda_d = 505.1\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=1.8%
 Ratio: R=13.6% G=82.5% B=3.9% ; Peak WL: $\lambda_p = 448.6\text{nm}$ FWHM=22.3nm
 Render Index: $R_a = 75.9$

R1 =74	R2 =79	R3 =82	R4 =77	R5 =76	R6 =72	R7 =83
R8 =63	R9 =0	R10=50	R11=76	R12=50	R13=75	R14=90 R15=69

Photo Parameters:

Flux = 21090 lm Eff. : 115.62 lm/W $P_e = 65.58\text{ W}$

Electrical parameters:

V = 219.75 V I = 0.8547 A P = 182.4 W PF = 0.9712

WHITE: ANSI_5700K

Status: Integral T = 1 ms $I_p = 28750$ (44%)

Model: LED OUTDOOR LIGHTING
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 98VECA200SMD
 Date: 2020-05-04 14:05:42
 Humidity: 65.0%
 Remarks: 6626