

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 98VEGA30SLIM

Type of light source:

| | | | |
|---|----------------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LED | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | Yes | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters


| Parameter | Value | Parameter | Value |
|--|---------------------------|--|------------------------|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 30 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 2 200 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 5 500 |
| On-mode power (P_{on}), expressed in W | 29,9 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,20 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, lighting control | Height | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| | Width | | |
| | Depth | | |

| | | | | |
|---|------|--|----------------|--|
| parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordinates (x and y) | 0,329 0,355 | |
| Parameters for directional light sources: | | | | |
| Peak luminous intensity (cd) | 782 | Beam angle in degrees, or the range of beam angles that can be set | 110 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,90 | |
| the lumen maintenance factor | 0,93 | | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos ϕ_1) | 0,90 | Colour consistency in McAdam ellipses | 1 | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - | |
| Flicker metric (Pst LM) | 0,0 | Stroboscopic effect metric (SVM) | 0,0 | |

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

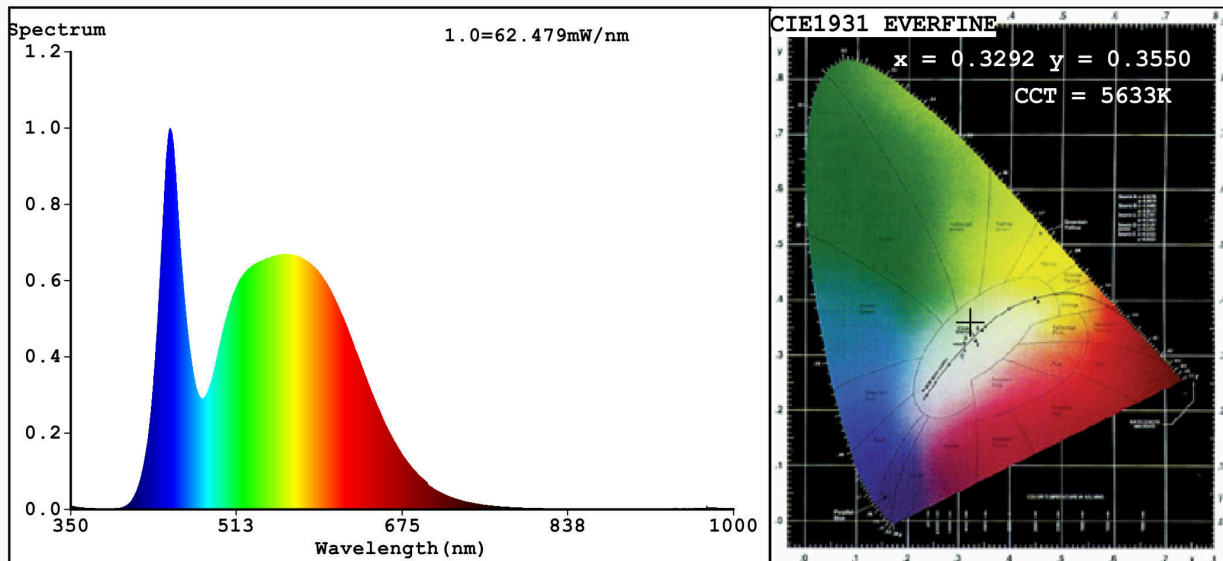

Color Parameters:

Chromaticity Coordinate: $x=0.3292$ $y=0.3550$ $u'=0.1995$ $v'=0.4840$
 CCT=5633K (Duv=0.0084) Dominant WL: $\lambda_d = 543.9\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=5.5%
 Ratio: R=13.8% G=81.5% B=4.7% ; Peak WL: $\lambda_p = 447.5\text{nm}$ FWHM=27.7nm
 Render Index: Ra=80.7

| | | | | | | |
|--------|--------|--------|--------|--------|--------|--------|
| R1 =77 | R2 =84 | R3 =91 | R4 =81 | R5 =79 | R6 =80 | R7 =87 |
| R8 =66 | R9 =0 | R10=64 | R11=81 | R12=62 | R13=79 | R14=95 |
| | | | | | | R15=71 |

Photo Parameters:

Flux = 2713 lm Eff. : 96.92 lm/W $\Phi_e = 8.443\text{ W}$

Electrical parameters:

V = 219.99 V I = 0.1403 A P = 28.00 W PF = 0.9067

WHITE:OUT

Status: Integral T = 17 ms $I_p = 46052$ (70%)

Model: LED FLOODLIGHT
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 98VEGA30SLIM
 Date: 2020-12-14 15:06:44
 Humidity: 65.0%
 Remarks: 7083