

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 98VEGA50SENSLIM/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value	
<b>General product parameters:</b>				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F	
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000	
On-mode power ( $P_{on}$ ), expressed in W	49,7	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50	
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	72	
Outer dimensions without	Height	Spectral power distribution in the	See image in last page	
	Width			200
	Depth			26

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,382 0,381
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	449		Beam angle in degrees, or the range of beam angles that can be set	110
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0		Survival factor	0,70
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,70		Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

**Spectrum Test Report**

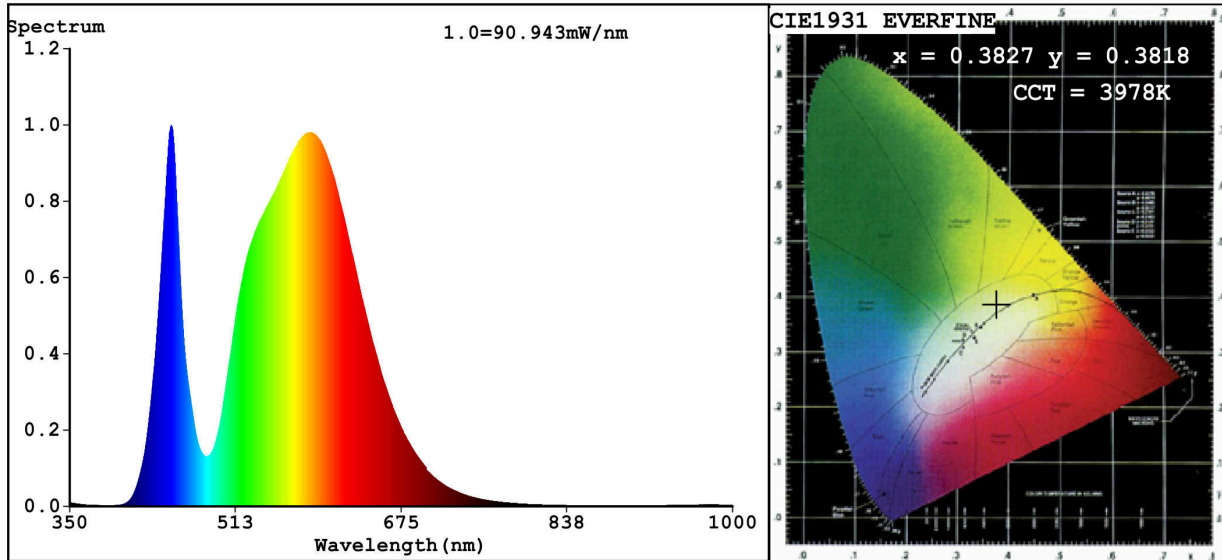

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3827$   $y=0.3818$  /  $u'=0.2245$   $v'=0.5041$   
 CCT=3978K (Duv=0.0017) Dominant WL:  $L_d = 578.3$ nm WL:  $L_c = --$ nm Purity=29.4%  
 Ratio: R=16.9% G=80.8% B=2.4% ; Peak WL:  $L_p = 449.6$ nm FWHM=23.9nm  
 Render Index:  $R_a = 72.6$  AvgR=64.5 TM30:  $R_f = 75$   $R_g = 94$   $L_{av} = 568.5$ nm

R1 =70    R2 =79    R3 =86    R4 =72    R5 =69    R6 =70    R7 =81  
 R8 =53    R9 =0    R10=50    R11=68    R12=43    R13=71    R14=92    R15=63

**Photo Parameters:**

Flux = 4990 lm    Eff. : 100.31 lm/W     $F_e = 14.39$  W

**Electrical parameters:**

V = 225.15 V    I = 0.2918 A    P = 49.75 W PF = 0.7573  
 WHITE:ANSI\_4000K

Status: Integral T = 11 ms     $I_p = 49398$  (75%)

Model:LED FLOODLIGHT  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:98VEGA50SEN  
 Date:2021-08-18 08:49:58  
 Humidity:65.0%  
 Remarks:7291