

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99FM1204024/BLE

Type of light source:

| | | | |
|---|----------------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LED | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters


| Parameter | Value | Parameter | Value |
|--|----------------------------|--|------------------------|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 24 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 000 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |
| On-mode power (P_{on}), expressed in W | 29,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 85 |
| Outer dimensions without | Height | Spectral power distribution in the | See image in last page |
| | Width | | |
| | Depth | | |

| | | | | |
|---|------|--|--------------------------------------|--|
| separate control gear, lighting control parts and non-lighting control parts, if any (millimetre) | | | range 250 nm to 800 nm, at full-load | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordinates (x and y) | 0,377 0,371 | |
| Parameters for directional light sources: | | | | |
| Peak luminous intensity (cd) | 453 | Beam angle in degrees, or the range of beam angles that can be set | 90 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 23 | Survival factor | 0,50 | |
| the lumen maintenance factor | 0,93 | | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos ϕ_1) | 0,50 | Colour consistency in McAdam ellipses | 4 | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - | |
| Flicker metric (Pst LM) | 0,5 | Stroboscopic effect metric (SVM) | 0,2 | |

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

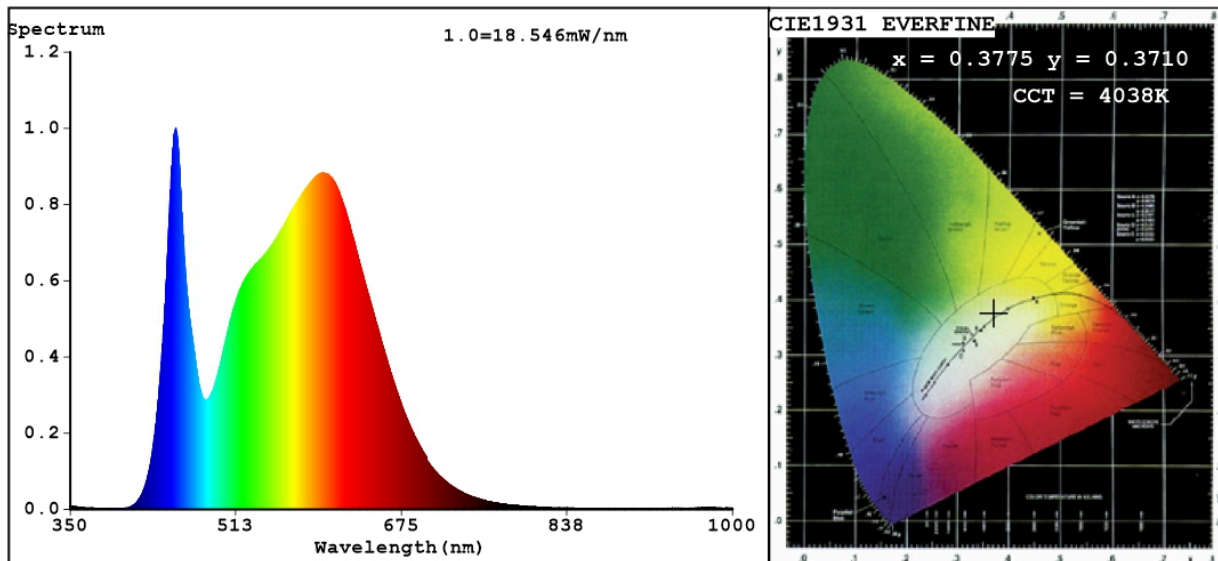

Color Parameters:

Chromaticity Coordinate: $x=0.3775$ $y=0.3710$ $u'=0.2255$ $v'=0.4986$
 CCT=4038K (Duv=-0.0019) Dominant WL:Ld =580.0nm WL:Lc = --nm Purity=24.6%
 Ratio:R=18.8% G=77.4% B=3.9% Peak WL:Lp=453.7nm FWHM=25.3nm
 Render Index:Ra=85.8 AvgR=80.2 TM30:Rf=85 Rg=96 Lav=570.3nm

| | | | | | | |
|--------|--------|--------|--------|--------|--------|---------------|
| R1 =85 | R2 =92 | R3 =96 | R4 =84 | R5 =85 | R6 =88 | R7 =87 |
| R8 =69 | R9 =23 | R10=80 | R11=84 | R12=65 | R13=87 | R14=98 R15=80 |

Photo Parameters:

Flux = 947.7 lm Eff. : 32.17 lm/W Fe = 2.978 W

Electrical parameters:

V = 225.17 V I = 0.2289 A P = 29.46 W PF = 0.5715

WHITE:ANSI_4000K

Status: Integral T = 64 ms Ip = 50941 (78%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99FM1204024
 Date:2022-01-26 11:10:09
 Humidity:65.0%
 Remarks: