

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99FM36S4009/GR

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	10,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,372 0,367	
Parameters for directional light sources:				
Peak luminous intensity (cd)	453	Beam angle in degrees, or the range of beam angles that can be set	90	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	19	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,20	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,5	Stroboscopic effect metric (SVM)	0,2	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

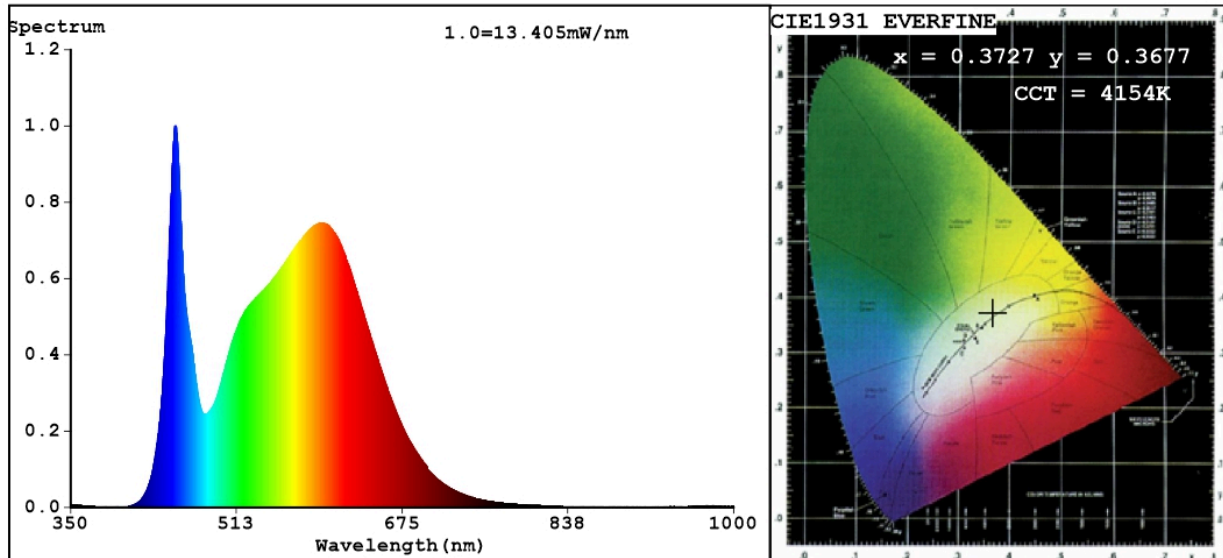

Color Parameters:

Chromaticity Coordinate: $x=0.3727$ $y=0.3677$ $u'=0.2236$ $v'=0.4964$
 $CCT=4154K$ ($Duv=-0.0020$) Dominant WL: $L_d = 579.8nm$ WL: $L_c = --nm$ Purity=22.2%
 Ratio: $R=18.3\%$ $G=77.7\%$ $B=4.0\%$ Peak WL: $L_p=453.0nm$ FWHM=20.2nm
 Render Index: $R_a=85.1$ AvgR=79.1 TM30: $R_f=84$ $R_g=96$ $L_{av}=567.9nm$

R1 =84	R2 =92	R3 =95	R4 =83	R5 =84	R6 =87	R7 =87
R8 =68	R9 =19	R10=79	R11=82	R12=62	R13=87	R14=98 R15=80

Photo Parameters:

Flux = 583.6 lm Eff. : 53.44 lm/W $F_e = 1.820 W$

Electrical parameters:

$V = 225.15 V$ $I = 0.2108 A$ $P = 10.92 W$ PF = 0.2301

WHITE:ANSI_4000K

Status: Integral T = 91 ms $I_p = 51692 (79\%)$

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99FM36S4009 BL
 Date:2022-02-01 12:57:42
 Humidity:65.0%
 Remarks: