

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99FM604012/WHE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	15,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,378 0,374
Parameters for directional light sources:				
Peak luminous intensity (cd)	453		Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:				
R9 colour rendering index value	18		Survival factor	0,40
the lumen maintenance factor	0,30			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,30		Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,5		Stroboscopic effect metric (SVM)	0,2

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

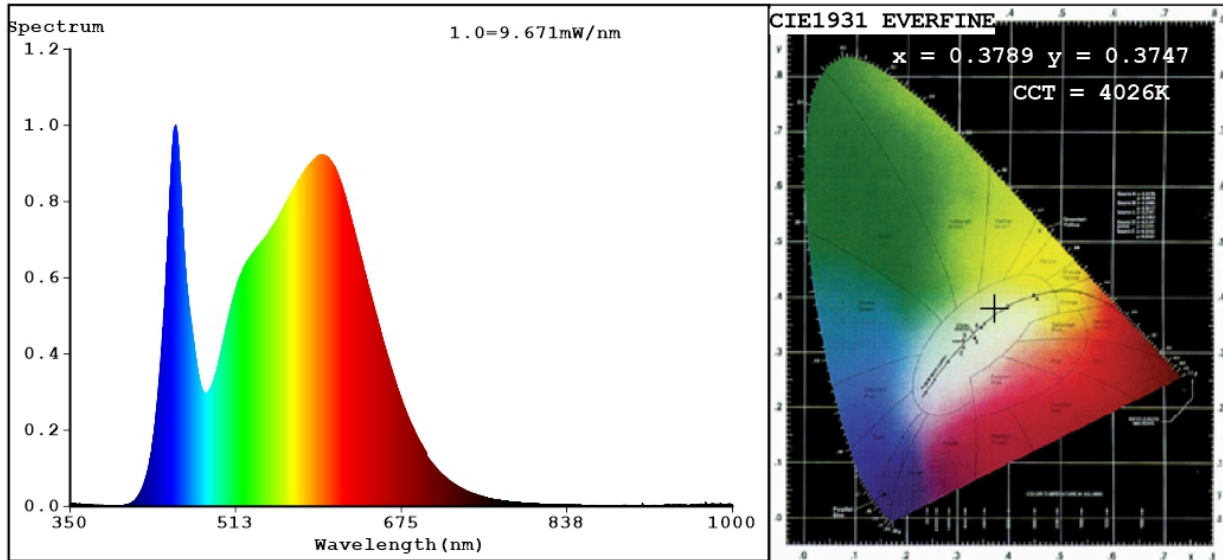

Color Parameters:

Chromaticity Coordinate: $x=0.3789$ $y=0.3747$ / $u'=0.2249$ $v'=0.5004$
 CCT=4026K (Duv=-0.0005) Dominant WL:Ld =579.3nm WL:Lc = --nm Purity=26.1%
 Ratio:R=18.6% G=77.6% B=3.8% ; Peak WL:Lp=453.7nm FWHM=25.8nm
 Render Index:Ra=84.8 AvgR=78.8 TM30:Rf=85 Rg=96 Lav=570.3nm

R1 =84 R2 =91 R3 =95 R4 =83 R5 =83 R6 =87 R7 =87
 R8 =68 R9 =18 R10=78 R11=82 R12=64 R13=86 R14=98 R15=78

Photo Parameters:

Flux = 517.0 lm Eff. : 32.67 lm/W Fe = 1.608 W

Electrical parameters:

V = 225.26 V I = 0.1993 A P = 15.82 W PF = 0.3525

WHITE:ANSI_4000K

Status: Integral T = 118 ms Ip = 51178 (78%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99FM604012
 Date:2022-01-26 13:00:48
 Humidity:65.0%
 Remarks: