

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED103S

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	300 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	7,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	35	
		Chromaticity coordinates (x and y)	0,520 0,417	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	13	Survival factor	0,50	
the lumen maintenance factor	0,90			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	30	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

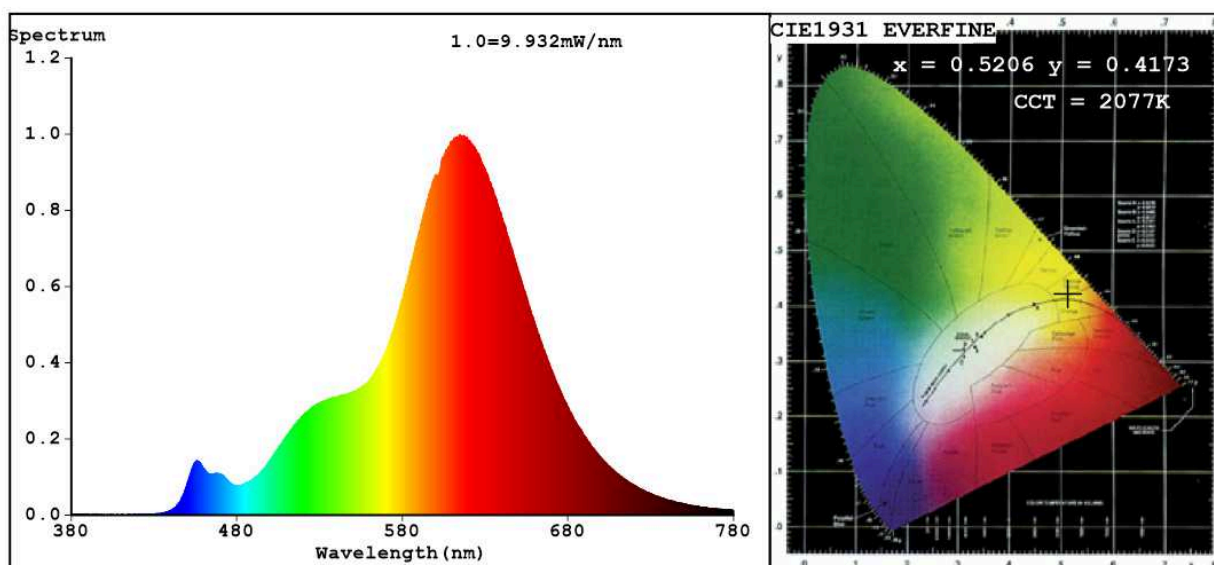

Color Parameters:

Chromaticity Coordinate: $x=0.5206$ $y=0.4173$ $u'=0.2989$ $v'=0.5391$

$CCT=2077K$ (Duv=0.0010) Dominant WL: $\lambda_d = 588.0nm$ Purity=81.5%

Ratio: R=33.4% G=65.3% B=1.4% ; Peak WL: $\lambda_p = 614.6nm$ FWHM=85.0nm

Render Index: $R_a=85.0$

R1 =87	R2 =97	R3 =91	R4 =87	R5 =89	R6 =95	R7 =78
R8 =56	R9 =13	R10=94	R11=94	R12=90	R13=90	R14=97
						R15=74

Photo Parameters:

Flux = 339.2 lm Eff. : 44.61 lm/W $\eta_e = 1.112$ W

Electrical parameters:

V = 230.01 V I = 0.03773 A P = 7.604 W PF = 0.8762

WHITE:OUT

Status: Integral T = 67 ms $I_p = 40828$ (62%)

Model: VINTAGE LAMP/8W
Tester: Petya Marinova
Temperature: 25.3Deg
Manufacturer: ELMARK

Number: 99LED103S
Date: 2019-03-21 13:29
Humidity: 65.0%
Remarks: SH18BG-JC_ELM03_5480