

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED610IP65CWE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	11,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,328 0,355	
Parameters for directional light sources:				
Peak luminous intensity (cd)	453	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,20	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

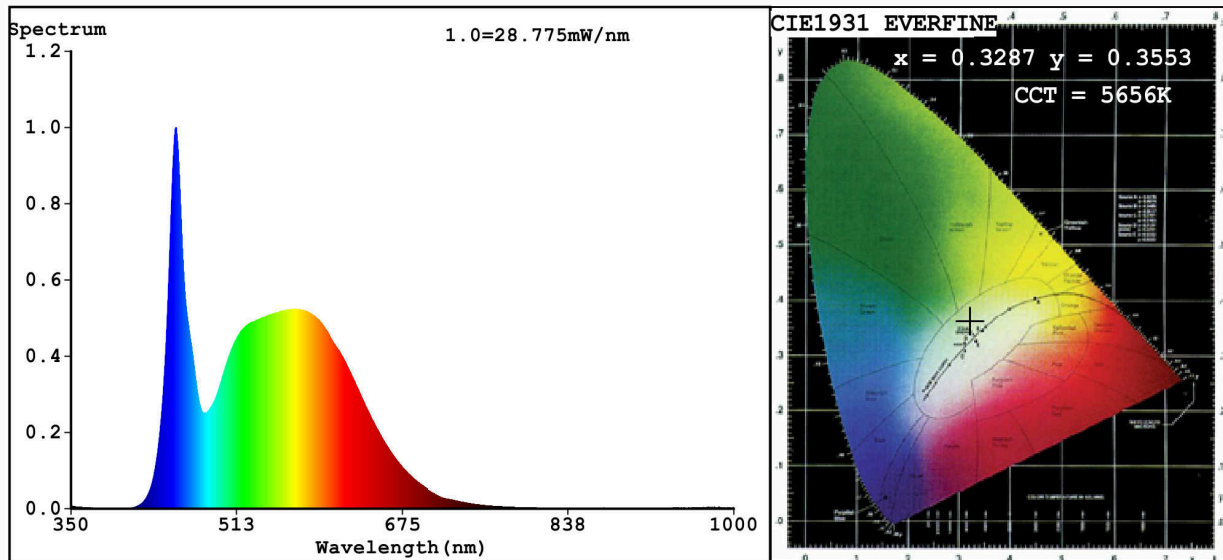

Color Parameters:

Chromaticity Coordinate: $x=0.3287$ $y=0.3553$ $u'=0.1991$ $v'=0.4840$
 CCT=5656K (Duv=0.0087) Dominant WL: $L_d=542.6\text{nm}$ WL: $L_c = \text{--nm}$ Purity=5.4%
 Ratio: R=13.8% G=81.0% B=5.2%; Peak WL: $L_p=453.0\text{nm}$ FWHM=20.2nm
 Render Index: Ra=81.5 AvgR=73.7 TM30: Rf=83 Rg=92 Lav=546.6nm

R1 =78	R2 =87	R3 =94	R4 =79	R5 =79	R6 =83	R7 =87
R8 =64	R9 =0	R10=71	R11=78	R12=55	R13=81	R14=97
						R15=72

Photo Parameters:

Flux = 977.5 lm Eff. : 81.57 lm/W Fe = 3.017 W

Electrical parameters:

V = 225.19 V I = 0.1926 A P = 11.98 W PF = 0.2763

WHITE:OUT

Status: Integral T = 44 ms Ip = 53667 (82%)

Model: LED PANEL ROUND
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED610IP65CW
 Date: 2021-07-28 14:48:47
 Humidity: 65.0%
 Remarks: 7593