

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED617IP44CWE

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 240 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power ( $P_{on}$ ), expressed in W	18,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,10	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,320 0,339	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	3	Survival factor	0,90	
the lumen maintenance factor	1,00			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,6	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

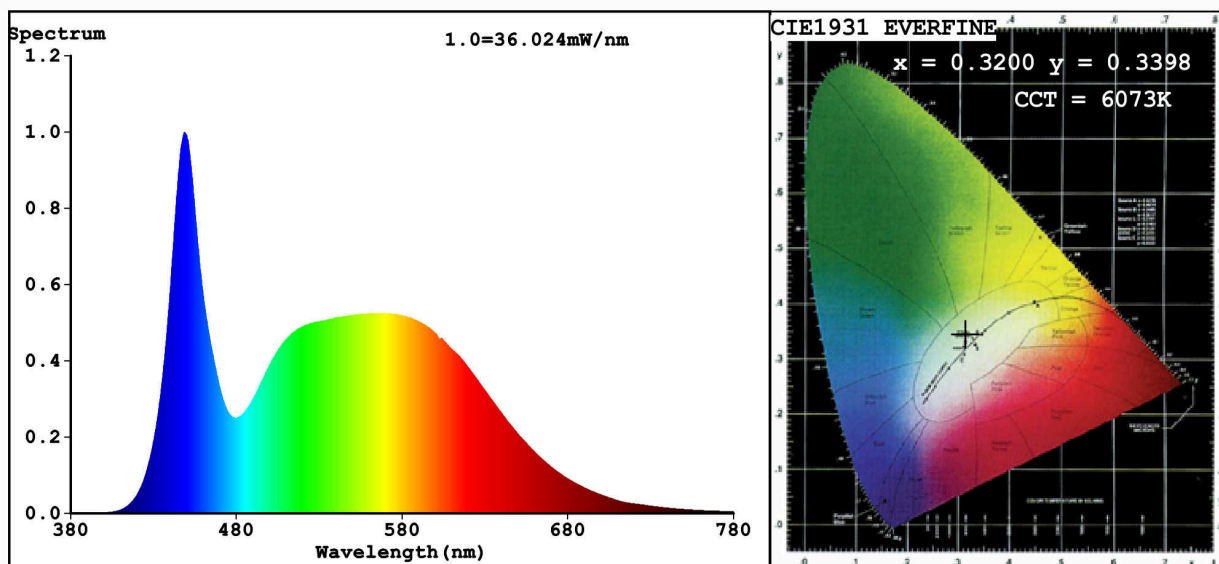

### Color Parameters:

Chromaticity Coordinate:  $x=0.3200$   $y=0.3398$   $u'=0.1988$   $v'=0.4750$

$CCT=6073K$  ( $Duv=0.0051$ ) Dominant WL:  $\lambda_d = 498.0nm$  Purity=4.2%

Ratio: R=13.7% G=81.1% B=5.2%; Peak WL:  $\lambda_p = 448.6nm$  FWHM=23.9nm

Render Index:  $R_a=82.7$

R1 =80	R2 =86	R3 =91	R4 =83	R5 =82	R6 =82	R7 =88
R8 =68	R9 =3	R10=68	R11=83	R12=62	R13=82	R14=95
						R15=75

### Photo Parameters:

Flux = 1240 lm Eff. : 70.46 lm/W  $F_e = 3.927 W$

### Electrical parameters:

$V = 230.00 V$   $I = 0.1455 A$   $P = 17.59 W$  PF = 0.5257

WHITE: ANSI\_6500K

Status: Integral T = 30 ms  $I_p = 59578 (91\%)$

Model: LED PANEL ROUND IP44/18W  
Tester: Petya Marinova  
Temperature: 25.3Deg  
Manufacturer: ELMARK

Number: 99LED617IP44CW  
Date: 2019-07-04 10:25  
Humidity: 65.0%  
Remarks: EI0011901\_5744