

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED617IP44E

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 250 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	17,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,389 0,385	
Parameters for directional light sources:				
Peak luminous intensity (cd)	593	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

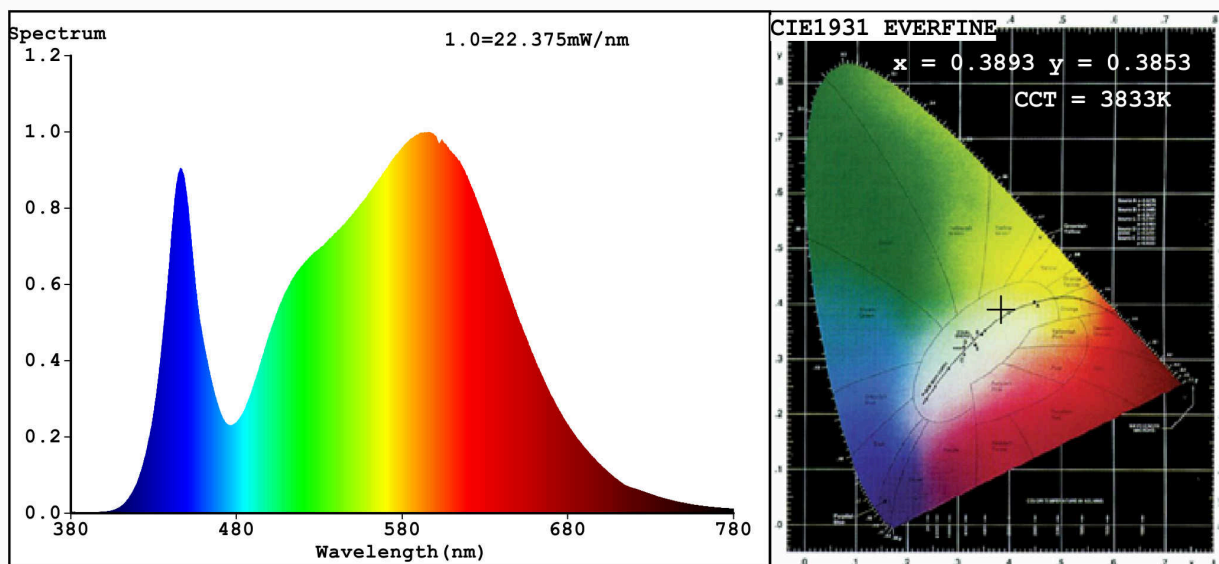

Color Parameters:

Chromaticity Coordinate: $x=0.3893$ $y=0.3853$ $u'=0.2275$ $v'=0.5066$

CCT=3833K(Duv=0.0015) Dominant WL:Ld =579.0nm Purity=32.5%

Ratio:R=18.6% G=78.2% B=3.2%; Peak WL:Lp=593.8nm FWHM=148.7nm

Render Index:Ra=82.0

R1 =80	R2 =87	R3 =94	R4 =82	R5 =81	R6 =83	R7 =86
R8 =63	R9 =5	R10=70	R11=82	R12=66	R13=81	R14=96
						R15=73

Photo Parameters:

Flux = 1269 lm Eff. : 73.87 lm/W Fe = 3.811 W

Electrical parameters:

V = 229.99 V I = 0.1426 A P = 17.18 W PF = 0.5238

WHITE:ANSI_4000K

Status: Integral T = 38 ms Ip = 54233 (83%)

Model:LED PANEL ROUND IP44/18W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:99LED617IP44
Date:2019-07-04 09:37
Humidity:65.0%
Remarks:EI0011901_5744