

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED641E

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	16,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	72
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,441 0,404	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	596	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,6	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

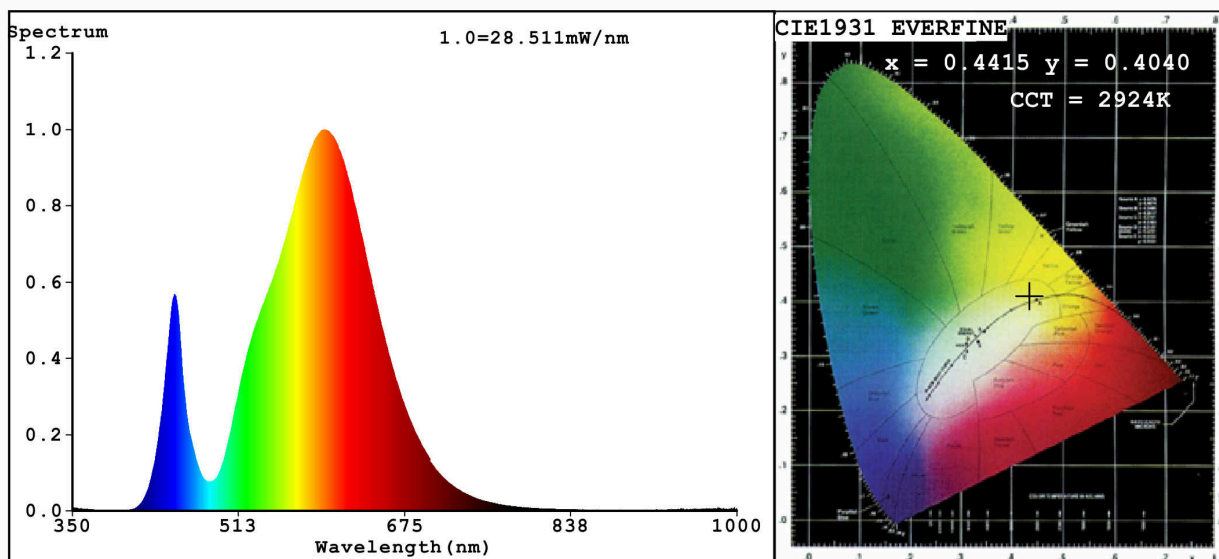

### Color Parameters:

Chromaticity Coordinate:  $x=0.4415$   $y=0.4040$  /  $u'=0.2535$   $v'=0.5220$   
 CCT=2924K (Duv=-0.0006) Dominant WL:  $\lambda_d = 583.4\text{nm}$  Purity=53.8%  
 Ratio: R=22.0% G=76.5% B=1.5%; Peak WL:  $\lambda_p = 596.2\text{nm}$  FWHM=120.3nm  
 Render Index:  $R_a = 72.7$   
 R1 =70 R2 =82 R3 =92 R4 =69 R5 =68 R6 =74 R7 =79  
 R8 =47 R9 =0 R10=58 R11=63 R12=47 R13=72 R14=95 R15=63

### Photo Parameters:

Flux = 1376 lm Eff. : 82.78 lm/W  $P_e = 4.010\text{ W}$

### Electrical parameters:

V = 220.14 V I = 0.1512 A P = 16.63 W PF = 0.4997

WHITE: ANSI\_3000K

Status: Integral T = 20 ms  $I_p = 44992$  (69%)

Model: LED GLASS PANEL ROUND/18W	Number: 99LED641
Tester: Petya Marinova	Date: 2015-05-26 14:30
Temperature: 25.3Deg	Humidity: 65.0%
Manufacturer: EVERFINE	Remarks: GW20141127