

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED737CW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 600 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P_{on}), expressed in W	40,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,312 0,336	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,90			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

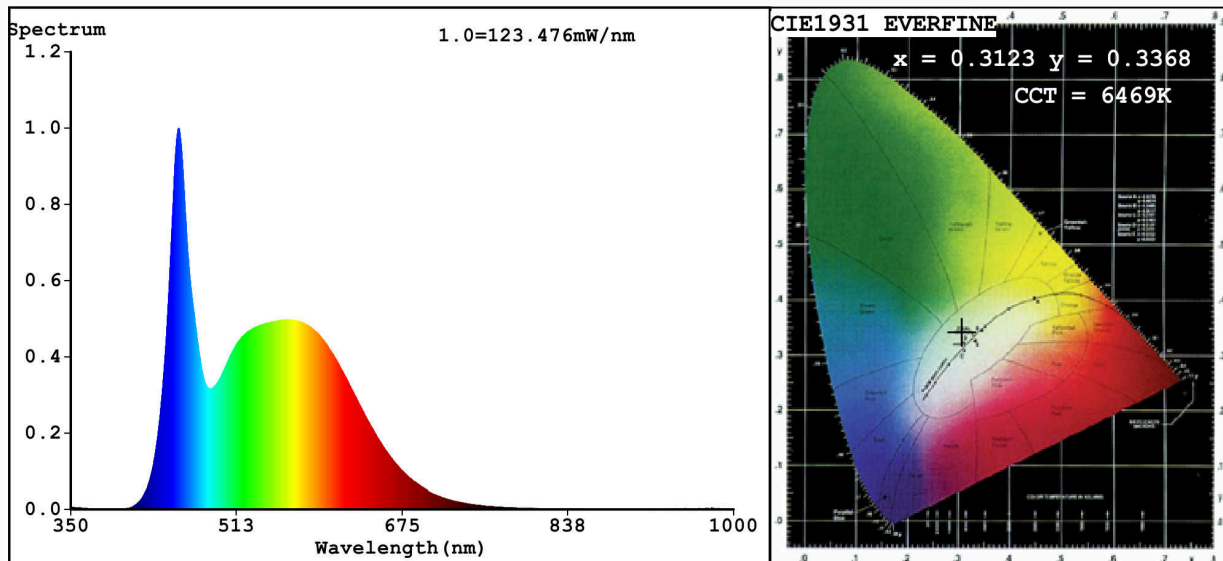

Color Parameters:

Chromaticity Coordinate: $x=0.3123$ $y=0.3368$ / $u'=0.1947$ $v'=0.4724$
 CCT=6469K (Duv=0.0073) Dominant WL: $\lambda_d = 493.8\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=6.9%
 Ratio: R=13.2% G=80.5% B=6.3% ; Peak WL: $\lambda_p = 455.7\text{nm}$ FWHM=27.1nm
 Render Index: $R_a = 83.4$

R1 =81	R2 =91	R3 =94	R4 =79	R5 =81	R6 =87	R7 =87
R8 =67	R9 =5	R10=78	R11=78	R12=59	R13=85	R14=97
						R15=75

Photo Parameters:

Flux = 4032 lm Eff. : 106.27 lm/W $P_e = 13.02\text{ W}$

Electrical parameters:

V = 221.45 V I = 0.1787 A P = 37.94 W PF = 0.9586
 WHITE: ANSI_6500K

Status: Integral T = 7 ms $I_p = 40679$ (62%)

Model: HIGH POWER LED LAMP
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED737CW
 Date: 2020-07-03 10:04:36
 Humidity: 65.0%
 Remarks: 6679