

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED772D

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	30	
		Chromaticity coordinates (x and y)	0,445 0,414	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	4	Survival factor	0,54	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,10	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes <sup>(b)</sup>	If yes then replacement claim (W)	5	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

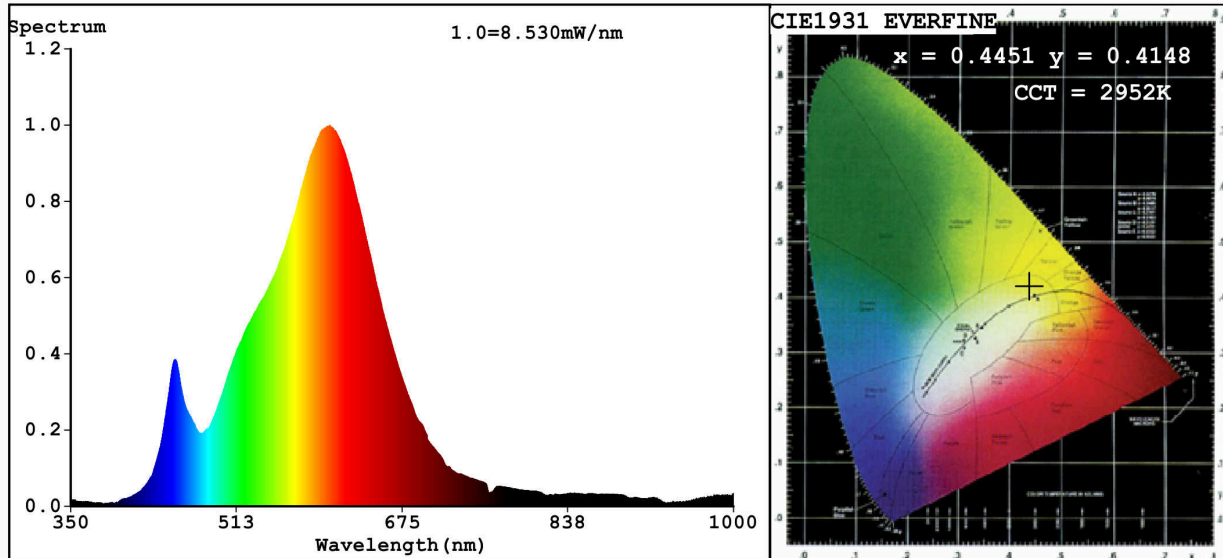

### Color Parameters:

Chromaticity Coordinate:  $x=0.4451$   $y=0.4148$   $u'=0.2512$   $v'=0.5268$   
 CCT=2952K (Duv=0.0031) Dominant WL:  $\lambda_d = 582.0\text{nm}$  WL:  $\lambda_c = \text{--nm}$  Purity=58.1%  
 Ratio: R=22.9% G=74.7% B=2.4% Peak WL:  $\lambda_p = 604.1\text{nm}$  FWHM=128.8nm  
 Render Index:  $R_a = 81.9$

R1 =80	R2 =90	R3 =97	R4 =80	R5 =80	R6 =88	R7 =84
R8 =58	R9 =4	R10=77	R11=79	R12=70	R13=82	R14=99 R15=72

### Photo Parameters:

Flux = 415.5 lm Eff. : 65.37 lm/W  $\Phi_e = 1.331\text{ W}$

### Electrical parameters:

V = 219.99 V I = 0.1873 A P = 6.356 W PF = 0.1543  
 WHITE: ANSI\_3000K

Status: Integral T = 104 ms  $I_p = 48892$  (75%)

Model: FILAMENT LED BULB  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 99LED772D  
 Date: 2020-10-09 13:52:22  
 Humidity: 65.0%  
 Remarks: 6856