

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED773D

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	760 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 100
On-mode power (P_{on}), expressed in W	7,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	78
Outer dimensions without	Height	100	Spectral power distribution in the See image in last page
	Width	100	
	Depth	60	

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	52	
		Chromaticity coordinates (x and y)	0,509 0,420	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,10	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	50	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a): not applicable;

(b): not applicable;

Spectrum Test Report

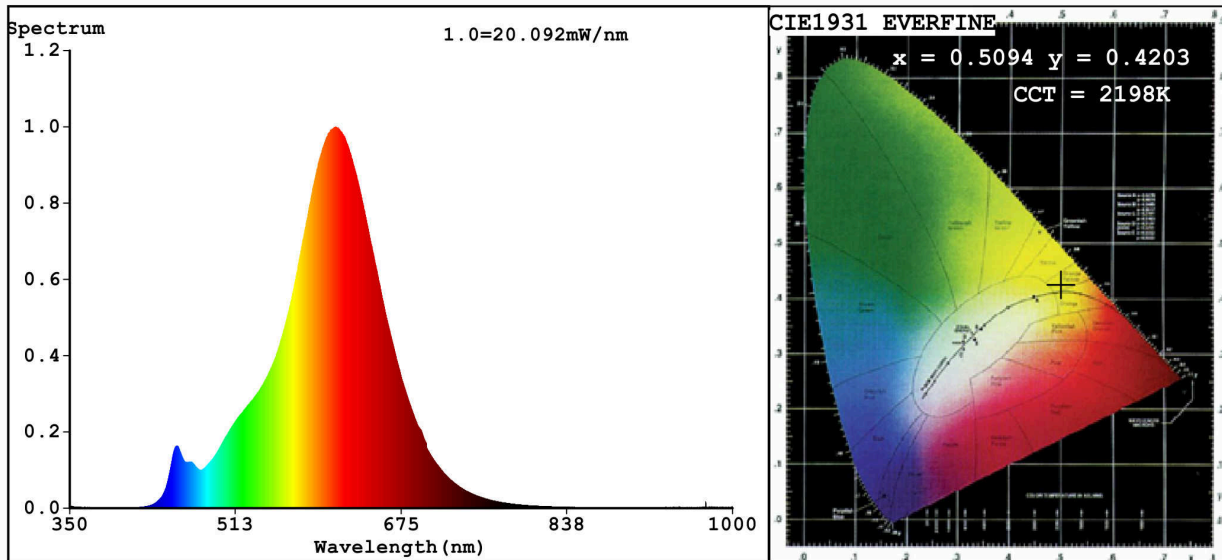

Color Parameters:

Chromaticity Coordinate: $x=0.5094$ $y=0.4203$ / $u'=0.2900$ $v'=0.5385$
 CCT=2198K (Duv=0.0016) Dominant WL:Ld =586.8nm WL:Lc = --nm Purity=79.1%
 Ratio:R=30.1% G=68.4% B=1.6%; Peak WL:Lp=610.8nm FWHM=97.7nm
 Render Index:Ra=78.5 AvgR=73.9 TM30:Rf=82 Rg=90 Lav=607.1nm

R1 =77 R2 =92 R3 =91 R4 =74 R5 =78 R6 =93 R7 =76
 R8 =48 R9 =0 R10=83 R11=74 R12=80 R13=80 R14=95 R15=67

Photo Parameters:

Flux = 769.6 lm Eff. : 97.06 lm/W Fe = 2.448 W

Electrical parameters:

V = 225.24 V I = 0.1912 A P = 7.929 W PF = 0.1841

WHITE:OUT

Status: Integral T = 66 ms Ip = 49357 (75%)

Model: FILAMENT LED BULB
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED773D
 Date: 2021-08-19 10:47:45
 Humidity: 65.0%
 Remarks: 7812