

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED817

## Type of light source:

|   |     |                                 |      |
|---|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | G9  |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | No  | Dimmable:                       | No   |

## Product parameters


| Parameter  | Value                | Parameter  | Value                  |
|--|----------------------|--|------------------------|
| <b>General product parameters:</b>   |                      |  |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 4                    | Energy efficiency class  | F                      |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 390 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 000                  |
| On-mode power ( $P_{on}$ ), expressed in W   | 4,0                  | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00                   |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 81                     |
| Outer dimensions without   | Height               | Spectral power distribution in the   | See image in last page |
|  | Width                |  |                        |
|  | Depth                |  |                        |

|   |                    |                                       |                                      |  |
|---|--------------------|---------------------------------------|--------------------------------------|--|
| separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)                       |                    |                                       | range 250 nm to 800 nm, at full-load |  |
| Claim of equivalent power <sup>(a)</sup>  | Yes                | If yes, equivalent power (W)          | 33                                   |  |
|   |                    | Chromaticity coordinates (x and y)    | 0,318<br>0,343                       |  |
| <b>Parameters for LED and OLED light sources:</b>   |                    |                                       |                                      |  |
| R9 colour rendering index value   | 4                  | Survival factor                       | 0,90                                 |  |
| the lumen maintenance factor  | 0,93               |                                       |                                      |  |
| <b>Parameters for LED and OLED mains light sources:</b>   |                    |                                       |                                      |  |
| displacement factor (cos $\phi_1$ )   | 0,40               | Colour consistency in McAdam ellipses | 5                                    |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | Yes <sup>(b)</sup> | If yes then replacement claim (W)     | 8                                    |  |
| Flicker metric (Pst LM)   | 0,6                | Stroboscopic effect metric (SVM)      | 0,2                                  |  |

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

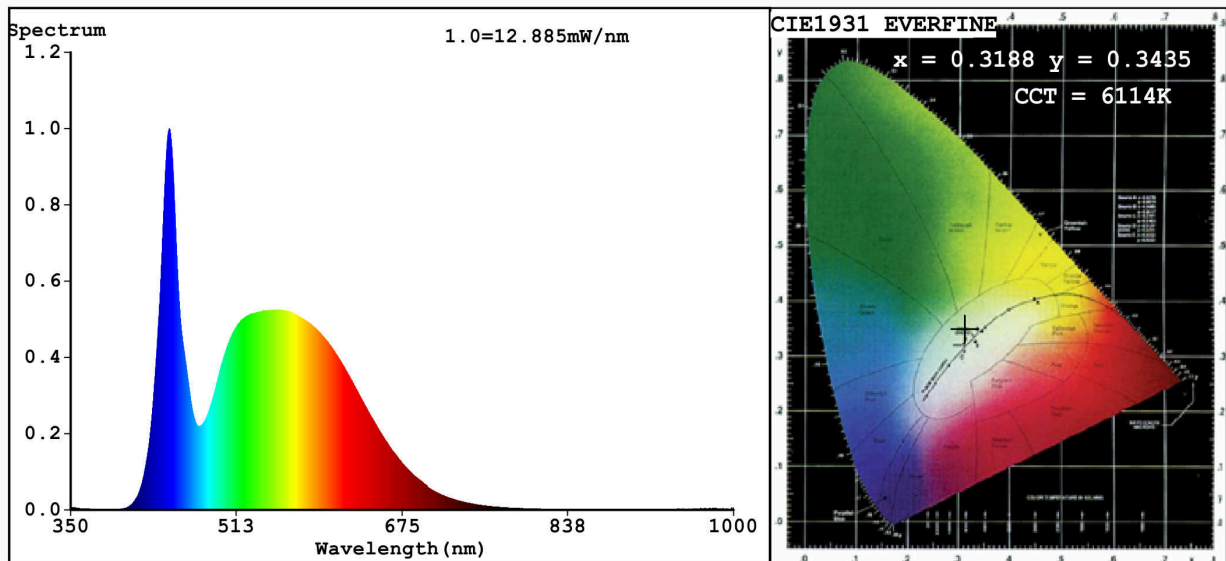

### Color Parameters:

Chromaticity Coordinate:  $x=0.3188$   $y=0.3435$   $u'=0.1967$   $v'=0.4768$   
 CCT=6114K (Duv=0.0075) Dominant WL:  $\lambda_d = 501.0\text{nm}$  WL:  $\lambda_c = \text{--nm}$  Purity=4.4%  
 Ratio: R=13.4% G=81.6% B=5.0%; Peak WL:  $\lambda_p = 446.9\text{nm}$  FWHM=21.5nm  
 Render Index:  $R_a = 81.5$

|        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|
| R1 =79 | R2 =84 | R3 =89 | R4 =83 | R5 =81 | R6 =80 | R7 =87 |
| R8 =70 | R9 =4  | R10=63 | R11=83 | R12=63 | R13=80 | R14=94 |
|        |        |        |        |        |        | R15=73 |

### Photo Parameters:

Flux = 438.6 lm Eff. : 112.67 lm/W  $\Phi_e = 1.407\text{ W}$

### Electrical parameters:

V = 219.97 V I = 0.03582 A P = 3.893 W PF = 0.4941

WHITE: ANSI\_6500K

Status: Integral T = 93 ms  $I_p = 49622$  (76%)

Model: LED LAMPS AND COMPONENTS  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 99LED817  
 Date: 2020-06-08 16:13:53  
 Humidity: 65.0%  
 Remarks: 6665