

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED858G

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

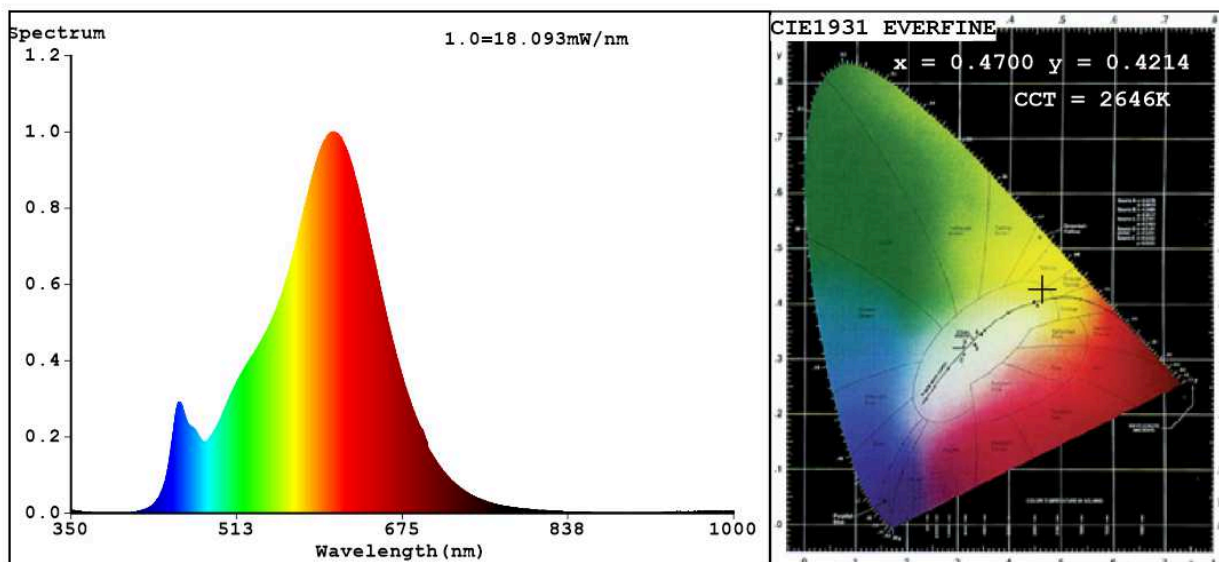
## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 800
On-mode power ( $P_{on}$ ), expressed in W	7,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,470 0,421	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	8	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes <sup>(b)</sup>	If yes then replacement claim (W)	55	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

**Spectrum Test Report****Color Parameters:**Chromaticity Coordinate:  $x=0.4700$   $y=0.4214$   $u'=0.2642$   $v'=0.5329$ 

CCT=2646K(Duv=0.0031) Dominant WL:Ld =583.5nm Purity=67.6%

Ratio:R=25.5% G=72.2% B=2.3%; Peak WL:Lp=607.8nm FWHM=115.0nm

Render Index:Ra=82.5

R1 =81	R2 =92	R3 =95	R4 =80	R5 =81	R6 =93	R7 =82	
R8 =57	R9 =8	R10=83	R11=79	R12=75	R13=84	R14=98	R15=72

**Photo Parameters:**

Flux = 814.2 lm Eff. : 102.06 lm/W Fe = 2.529 W

**Electrical parameters:**

V = 229.90 V I = 0.03637 A P = 7.978 W PF = 0.9540

WHITE:ANSI\_2700K

Status: Integral T = 41 ms Ip = 46736 (71%)

---

Model:VINTAGE LAMPS/8W  
Tester:Petya Marinova  
Temperature:25.3Deg  
Manufacturer:ELMARK

Number:99LED858G  
Date:2019-02-07 12:58  
Humidity:65.0%  
Remarks:Î18À016\_4838