

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED860G

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

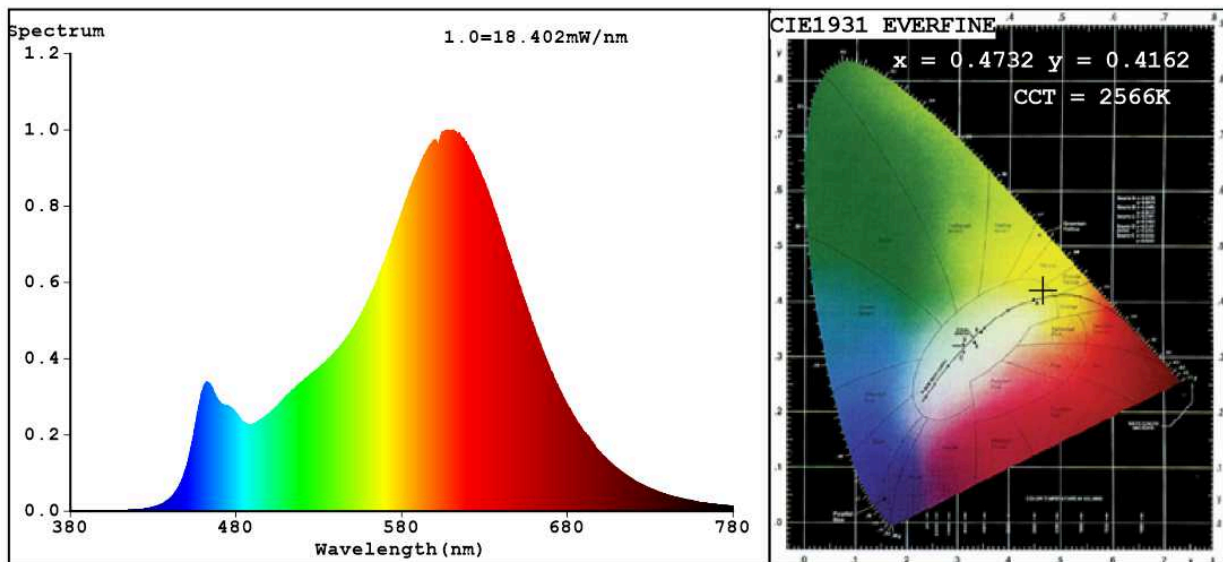
Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,3	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,473 0,416	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	7	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	55	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report**Color Parameters:**Chromaticity Coordinate: $x=0.4732$ $y=0.4162$ / $u'=0.2686$ $v'=0.5314$

CCT=2566K(Duv=0.0011) Dominant WL:Ld =584.6nm Purity=67.0%

Ratio:R=26.5% G=70.9% B=2.6%; Peak WL:Lp=607.5nm FWHM=105.1nm

Render Index:Ra=81.9

R1 =82	R2 =95	R3 =89	R4 =78	R5 =83	R6 =96	R7 =78	
R8 =54	R9 =7	R10=91	R11=78	R12=80	R13=86	R14=95	R15=73

Photo Parameters:

Flux = 791.0 lm Eff. : 95.02 lm/W Fe = 2.449 W

Electrical parameters:

V = 229.93 V I = 0.03784 A P = 8.325 W PF = 0.9569

WHITE:OUT

Status: Integral T = 45 ms Ip = 52074 (79%)

Model:VINTAGE LAMP/8W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:99LED860G
Date:2019-03-19 14:24
Humidity:65.0%
Remarks:018V047B_4838