

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED888S

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	8,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,440 0,408	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	9	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes <sup>(b)</sup>	If yes then replacement claim (W)	55	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

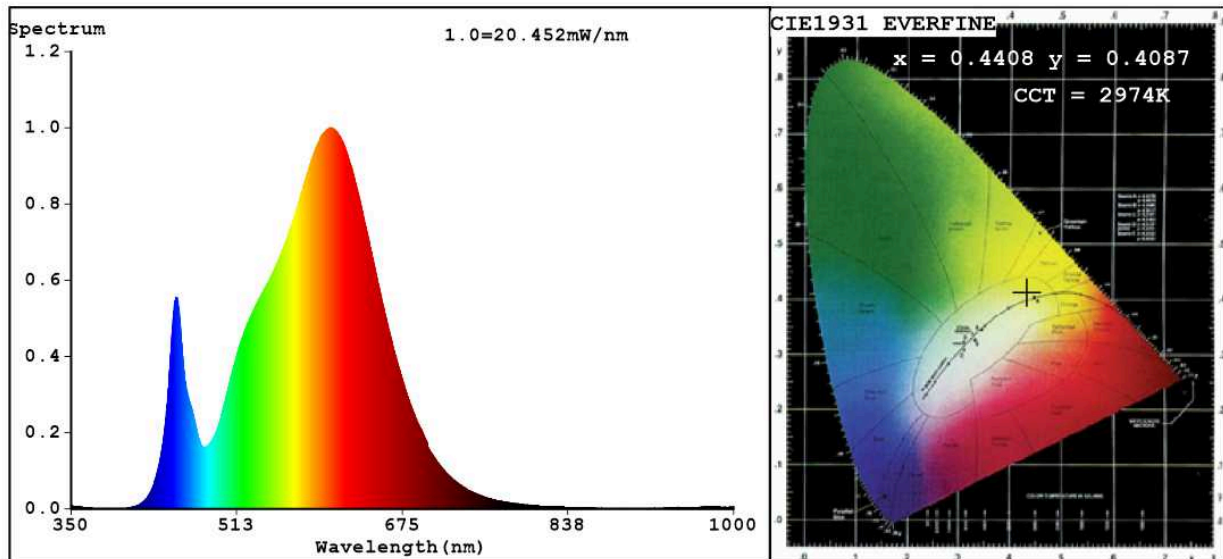

### Color Parameters:

Chromaticity Coordinate:  $x=0.4408$   $y=0.4087$   $u'=0.2511$   $v'=0.5238$   
 CCT=2974K (Duv=0.0013) Dominant WL:Ld =582.5nm WL:Lc = --nm Purity=55.0%  
 Ratio:R=23.0% G=74.8% B=2.3% ; Peak WL:Lp=604.4nm FWHM=133.7nm  
 Render Index:Ra=82.2

R1 =81	R2 =90	R3 =97	R4 =80	R5 =80	R6 =86	R7 =84
R8 =60	R9 =9	R10=75	R11=79	R12=64	R13=82	R14=98 R15=74

### Photo Parameters:

Flux = 1007 lm Eff. : 124.99 lm/W Fe = 3.072 W

### Electrical parameters:

V = 220.01 V I = 0.03837 A P = 8.057 W PF = 0.9545

WHITE:ANSI\_3000K

Status: Integral T = 50 ms Ip = 50735 (77%)

Model:FILAMENT LED  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:99LED888G  
 Date:2020-10-27 09:17:47  
 Humidity:65.0%  
 Remarks:6406