

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED889S

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	8,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,457 0,414	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	55	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

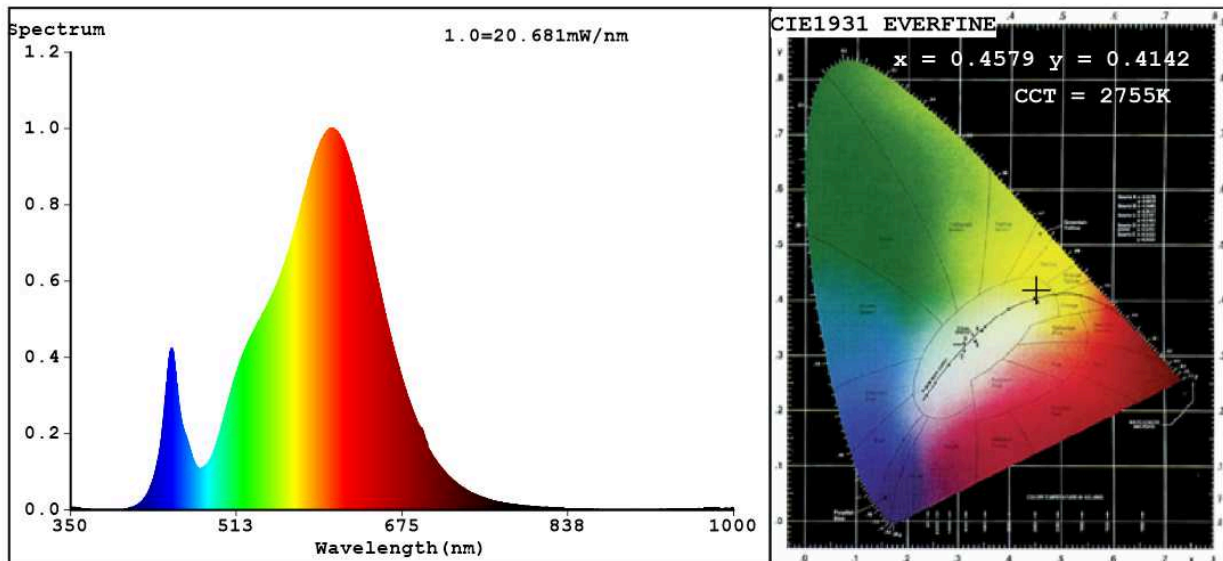

Color Parameters:

Chromaticity Coordinate: $x=0.4579$ $y=0.4142$ $u'=0.2597$ $v'=0.5284$
 $CCT=2755K$ ($Duv=0.0015$) Dominant WL: $L_d = 583.5nm$ WL: $L_c = --nm$ Purity=61.8%
 Ratio: $R=24.4\%$ $G=73.8\%$ $B=1.8\%$ Peak WL: $L_p=604.2nm$ FWHM=124.0nm
 Render Index: $R_a=81.0$

R1 =79	R2 =88	R3 =97	R4 =80	R5 =78	R6 =85	R7 =83
R8 =58	R9 =4	R10=73	R11=78	R12=66	R13=81	R14=98
						R15=72

Photo Parameters:

Flux = 966.3 lm Eff. : 117.56 lm/W Fe = 2.957 W

Electrical parameters:

V = 220.01 V I = 0.03906 A P = 8.220 W PF = 0.9565

WHITE: ANSI_2700K

Status: Integral T = 50 ms Ip = 51298 (78%)

Model: FILAMENT LED
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED889S
 Date: 2020-10-27 08:55:05
 Humidity: 65.0%
 Remarks: 6406