

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED915

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	850 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	8,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	60	
		Chromaticity coordinates (x and y)	0,447 0,412	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	14	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

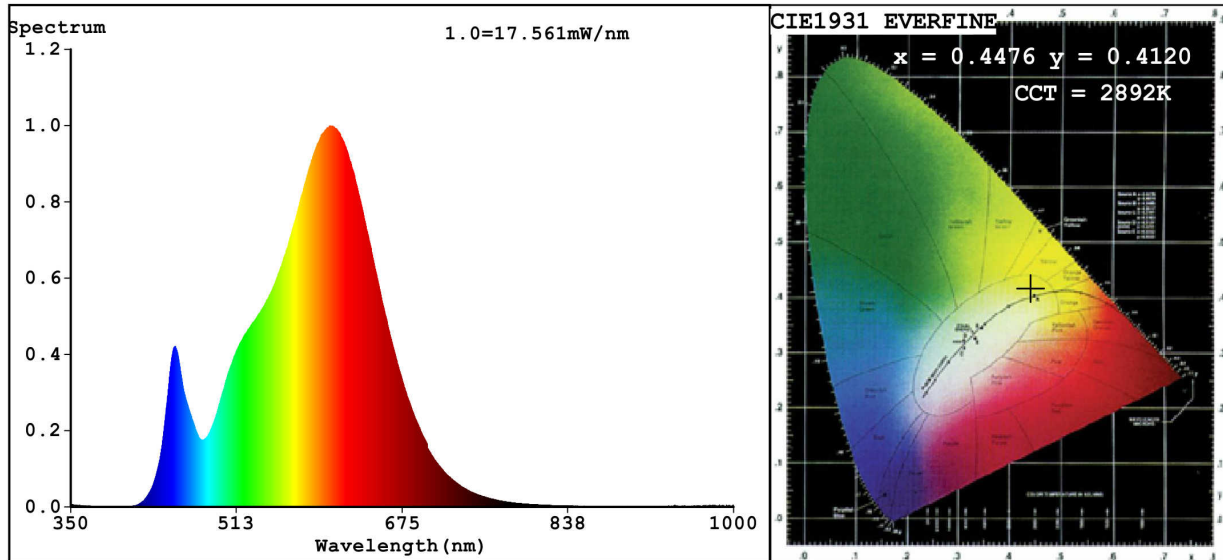

Color Parameters:

Chromaticity Coordinate: $x=0.4476$ $y=0.4120$ $u'=0.2540$ $v'=0.5260$
 CCT=2892K (Duv=0.0017) Dominant WL: $\lambda_d = 582.7\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=58.0%
 Ratio: R=23.6% G=74.0% B=2.4% Peak WL: $\lambda_p = 604.1\text{nm}$ FWHM=126.2nm
 Render Index: $R_a = 83.2$

R1 =81	R2 =91	R3 =97	R4 =81	R5 =82	R6 =90	R7 =83
R8 =60	R9 =9	R10=80	R11=81	R12=72	R13=84	R14=99 R15=74

Photo Parameters:

Flux = 843.4 lm Eff. : 103.29 lm/W $\Phi_e = 2.574$ W

Electrical parameters:

V = 219.98 V I = 0.06775 A P = 8.166 W PF = 0.5479

WHITE: ANSI_3000K

Status: Integral T = 58 ms $I_p = 50579$ (77%)

Model: LED PEART A60
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED915
 Date: 2020-10-14 08:32:33
 Humidity: 65.0%
 Remarks: 6944