

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED928

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G5		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	98,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,379 0,376	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

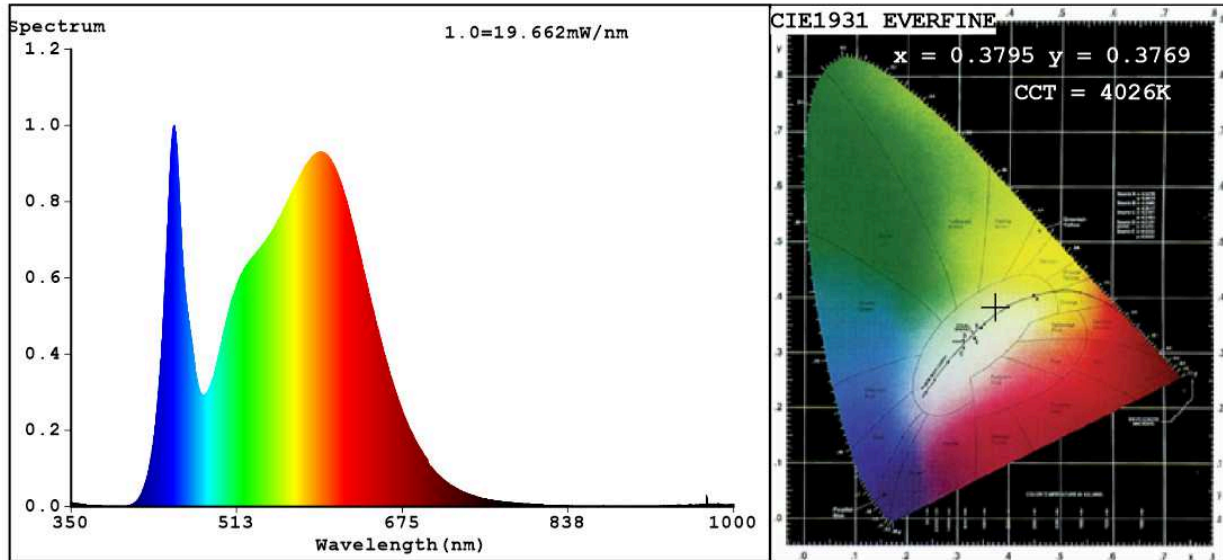

Color Parameters:

Chromaticity Coordinate: $x=0.3795$ $y=0.3769$ $u'=0.2245$ $v'=0.5015$
 CCT=4026K (Duv=0.0003) Dominant WL: $L_d = 578.8\text{nm}$ WL: $L_c = \text{--nm}$ Purity=27.0%
 Ratio: R=18.3% G=77.9% B=3.7% Peak WL: $L_p = 451.3\text{nm}$ FWHM=24.1nm
 Render Index: $R_a = 83.8$

R1 =82	R2 =90	R3 =96	R4 =83	R5 =82	R6 =86	R7 =86
R8 =65	R9 =10	R10=76	R11=82	R12=64	R13=84	R14=98 R15=76

Photo Parameters:

Flux = 1052 lm Eff. : 107.32 lm/W $F_e = 3.216$ W

Electrical parameters:

V = 229.97 V I = 0.07825 A P = 9.800 W PF = 0.5446

WHITE: ANSI_4000K

Status: Integral T = 43 ms $I_p = 43199$ (66%)

Model: LED TUBE T5/10W
 Tester: Petya Marinova
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99LED928
 Date: 2019-11-05 13:05:50
 Humidity: 65.0%
 Remarks: LGZVRN981363VRN_6161