

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99LED932WW

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 000 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	14,3	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	65	
		Chromaticity coordinates (x and y)	0,437 0,402	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	602	Beam angle in degrees, or the range of beam angles that can be set	90	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	3	Survival factor	0,50	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes <sup>(b)</sup>	If yes then replacement claim (W)	60	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

**Spectrum Test Report**

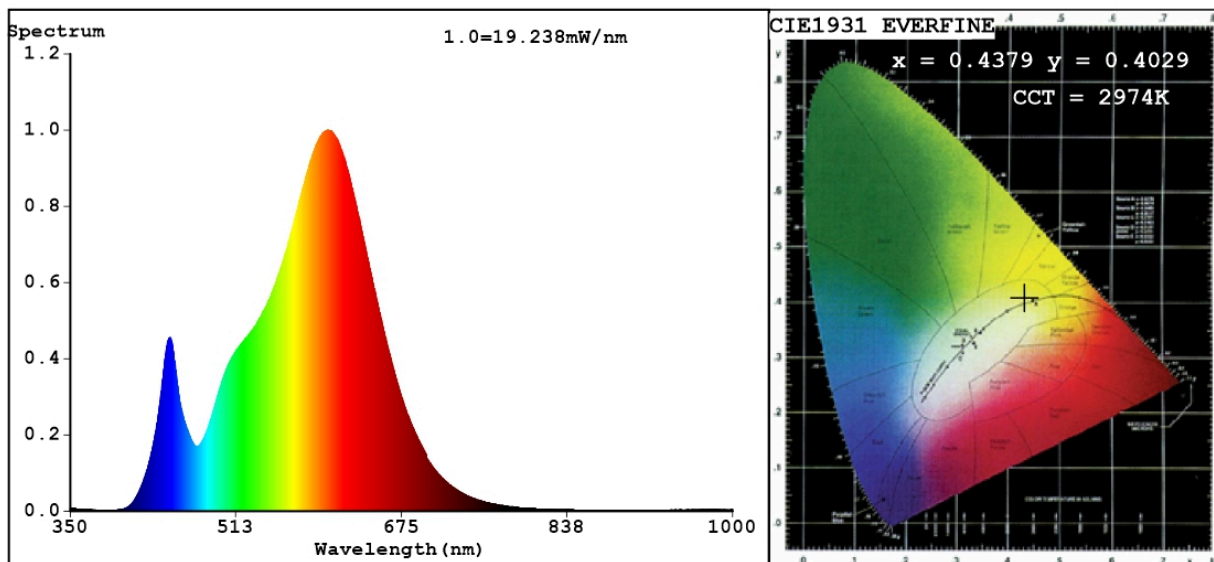

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4379$   $y=0.4029$  /  $u'=0.2517$   $v'=0.5211$

CCT=2974K (Duv=-0.0006) Dominant WL:  $\lambda_d = 583.1\text{nm}$  Purity=52.4%

Ratio: R=23.0% G=74.4% B=2.6%; Peak WL:  $\lambda_p = 602.8\text{nm}$  FWHM=120.7nm

Render Index: Ra=82.2

R1 =80	R2 =91	R3 =96	R4 =81	R5 =81	R6 =90	R7 =82	
R8 =57	R9 =3	R10=80	R11=81	R12=78	R13=83	R14=98	R15=72

**Photo Parameters:**

Flux = 925.1 lm Eff. : 64.62 lm/W  $F_e = 2.828$  W

**Electrical parameters:**

V = 229.87 V I = 0.1139 A P = 14.32 W PF = 0.5466

WHITE: ANSI\_3000K

Status: Integral T = 35 ms  $I_p = 42578$  (65%)

Model: PAR30 IP65/15W  
Tester: Petya Marinova  
Temperature: 25.3Deg  
Manufacturer: ELMARK

Number: 99LED932WW  
Date: 2018-11-12 09:25  
Humidity: 65.0%  
Remarks: 27Q39118048\_4806