

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED933

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	7,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	63	
		Chromaticity coordinates (x and y)	0,439 0,400	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	60	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

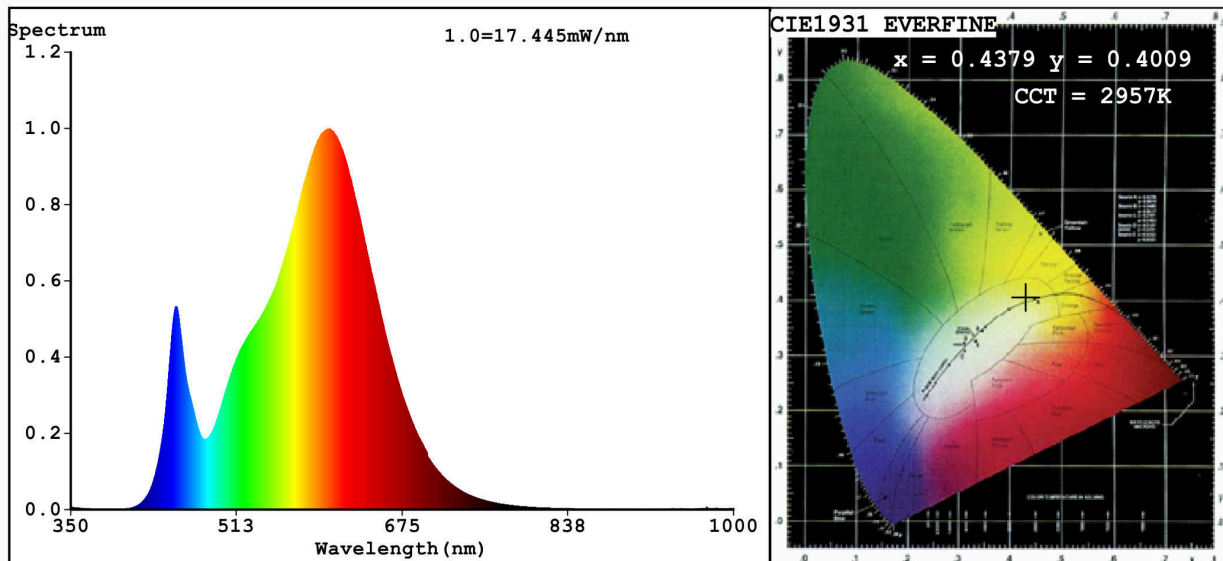

Color Parameters:

Chromaticity Coordinate: $x=0.4379$ $y=0.4009$ $u'=0.2526$ $v'=0.5203$
 CCT=2957K (Duv=-0.0014) Dominant WL:Ld =583.5nm WL:Lc = --nm Purity=51.8%
 Ratio:R=23.1% G=74.3% B=2.6% ; Peak WL:Lp=604.1nm FWHM=120.8nm
 Render Index:Ra=81.5

R1 =80	R2 =91	R3 =95	R4 =79	R5 =80	R6 =90	R7 =81
R8 =56	R9 =3	R10=80	R11=78	R12=71	R13=83	R14=98 R15=73

Photo Parameters:

Flux = 834.3 lm Eff. : 112.38 lm/W Fe = 2.543 W

Electrical parameters:

V = 219.99 V I = 0.05886 A P = 7.424 W PF = 0.5734
 WHITE:ANSI_3000K

Status: Integral T = 58 ms Ip = 50247 (77%)

Model:LED INTERIOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99LED933
 Date:2020-10-29 10:57:19
 Humidity:65.0%
 Remarks:6942