

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED933W

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	G9		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	7,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	63	
		Chromaticity coordinates (x and y)	0,385 0,384	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	6	Survival factor	0,90	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	60	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

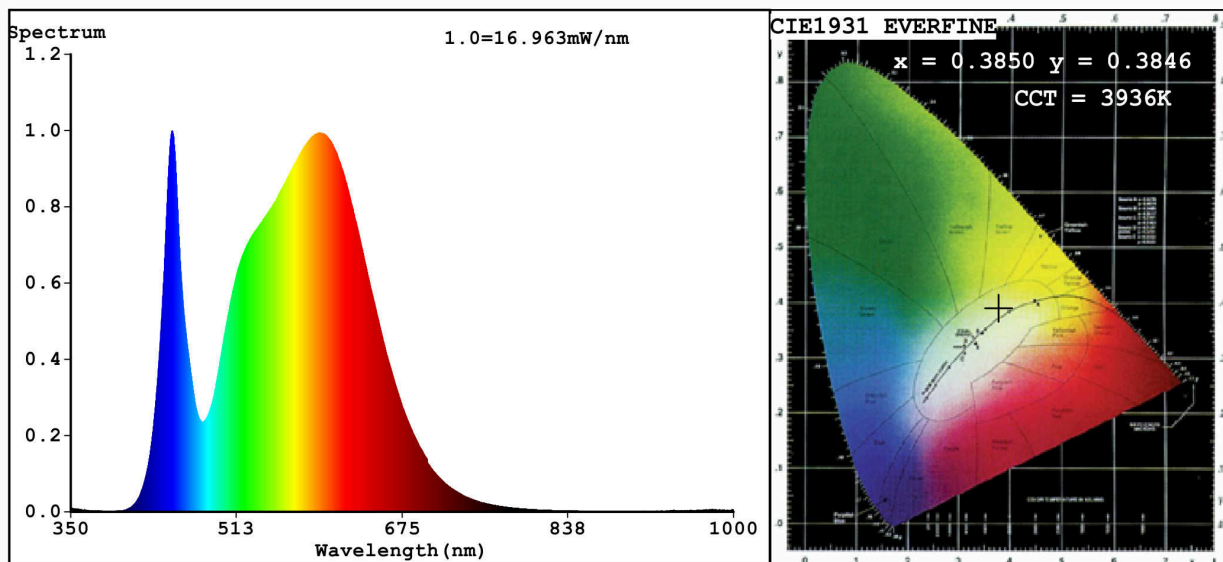

Color Parameters:

Chromaticity Coordinate: $x=0.3850$ $y=0.3846$ $u'=0.2250$ $v'=0.5057$
 CCT=3936K (Duv=0.0023) Dominant WL:Ld =578.2nm WL:Lc = --nm Purity=31.0%
 Ratio:R=18.3% G=78.6% B=3.2%; Peak WL:Lp=449.6nm FWHM=23.1nm
 Render Index:Ra=81.9

R1 =80	R2 =87	R3 =93	R4 =82	R5 =80	R6 =82	R7 =87
R8 =65	R9 =6	R10=69	R11=81	R12=60	R13=81	R14=96 R15=74

Photo Parameters:

Flux = 981.5 lm Eff. : 128.21 lm/W Fe = 2.963 W

Electrical parameters:

V = 219.94 V I = 0.05903 A P = 7.655 W PF = 0.5896
 WHITE:ANSI_4000K

Status: Integral T = 49 ms Ip = 39463 (60%)

Model:LED LAMPS AND COMPONENTS
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99LED933W
 Date:2020-06-08 16:08:29
 Humidity:65.0%
 Remarks:6665