

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED968

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 500 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	18,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,373 0,368	
Parameters for directional light sources:				
Peak luminous intensity (cd)	493	Beam angle in degrees, or the range of beam angles that can be set	113	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	8	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,40	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

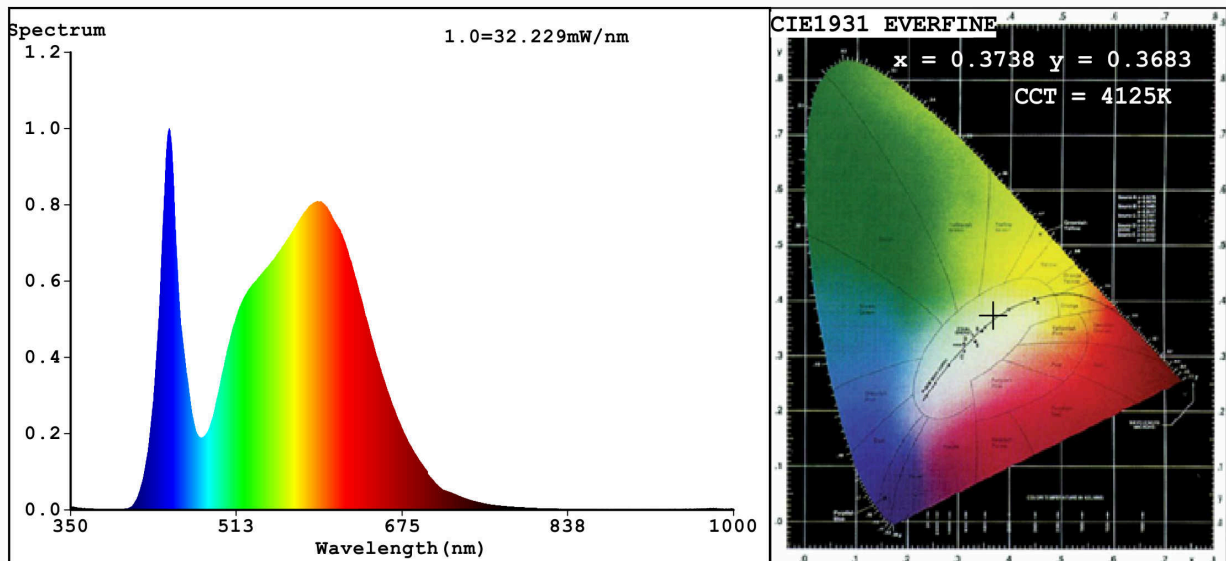

Color Parameters:

Chromaticity Coordinate: $x=0.3738$ $y=0.3683$ $u'=0.2241$ $v'=0.4968$
 CCT=4125K (Duv=-0.0020) Dominant WL:Ld =579.9nm WL:Lc = --nm Purity=22.7%
 Ratio:R=17.9% G=78.8% B=3.3%; Peak WL:Lp=446.8nm FWHM=21.3nm
 Render Index:Ra=81.8

R1 =81	R2 =87	R3 =91	R4 =82	R5 =81	R6 =82	R7 =85
R8 =66	R9 =8	R10=68	R11=82	R12=63	R13=82	R14=95 R15=75

Photo Parameters:

Flux = 1511 lm Eff. : 81.79 lm/W Fe = 4.641 W

Electrical parameters:

V = 219.94 V I = 0.1705 A P = 18.47 W PF = 0.4927

WHITE:ANSI_4000K

Status: Integral T = 28 ms Ip = 38965 (59%)

Model:LED PANEL SQUARE
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99LED968
 Date:2021-01-14 09:45:56
 Humidity:65.0%
 Remarks:7293