

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED969CW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	17,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,314 0,333	
Parameters for directional light sources:				
Peak luminous intensity (cd)	474	Beam angle in degrees, or the range of beam angles that can be set	113	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,40	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

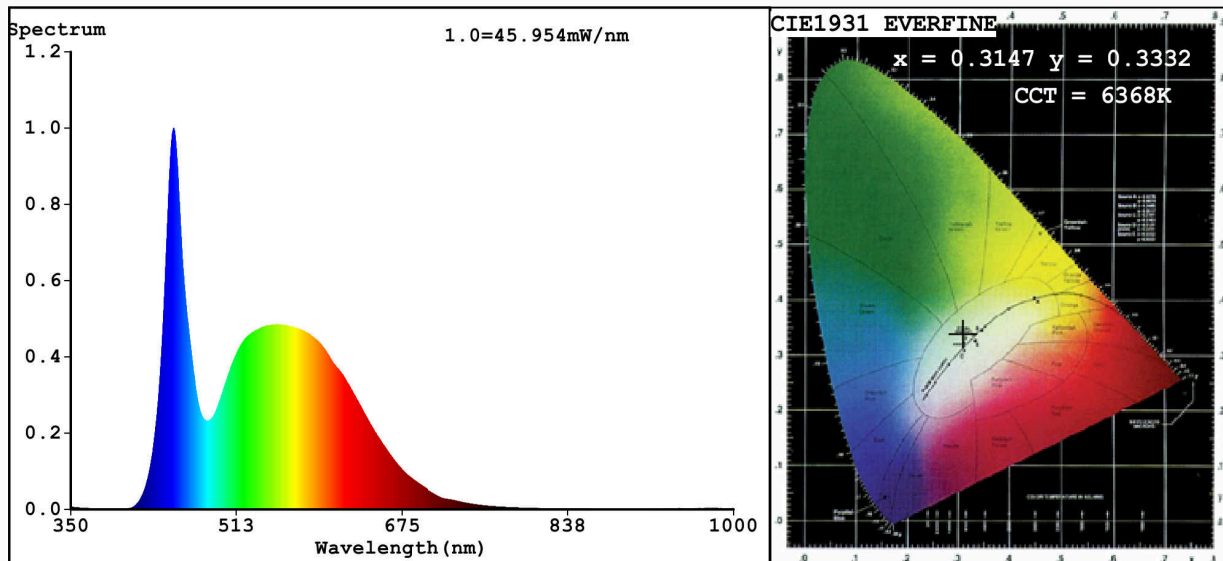

Color Parameters:

Chromaticity Coordinate: $x=0.3147$ $y=0.3332$ $u'=0.1977$ $v'=0.4709$
CCT=6368K (Duv=0.0043) Dominant WL: $\lambda_d = 491.6\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=6.3%
Ratio: R=13.4% G=81.2% B=5.4% Peak WL: $\lambda_p = 450.9\text{nm}$ FWHM=23.5nm
Render Index: $R_a = 82.6$

R1 =81 R2 =87 R3 =90 R4 =82 R5 =81 R6 =81 R7 =89
R8 =71 R9 =9 R10=67 R11=81 R12=56 R13=82 R14=94 R15=76

Photo Parameters:

Flux = 1436 lm Eff. : 81.44 lm/W $P_e = 4.639\text{ W}$

Electrical parameters:

V = 219.93 V I = 0.1724 A P = 17.63 W PF = 0.4650
WHITE: ANSI_6500K

Status: Integral T = 30 ms $I_p = 53098$ (81%)

Model: LED PANEL SQUARE
Tester: Atanas DAKOV
Temperature: 25.3Deg
Manufacturer: ELMARK

Number: 99LED969CW
Date: 2021-03-18 08:50:05
Humidity: 65.0%
Remarks: 7455