

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED972

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	820 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	13,3	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	166	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	166	
	Depth	18	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,391 0,389
Parameters for directional light sources:			
Peak luminous intensity (cd)	303	Beam angle in degrees, or the range of beam angles that can be set	119
Parameters for LED and OLED light sources:			
R9 colour rendering index value	3	Survival factor	0,50
the lumen maintenance factor	0,93		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

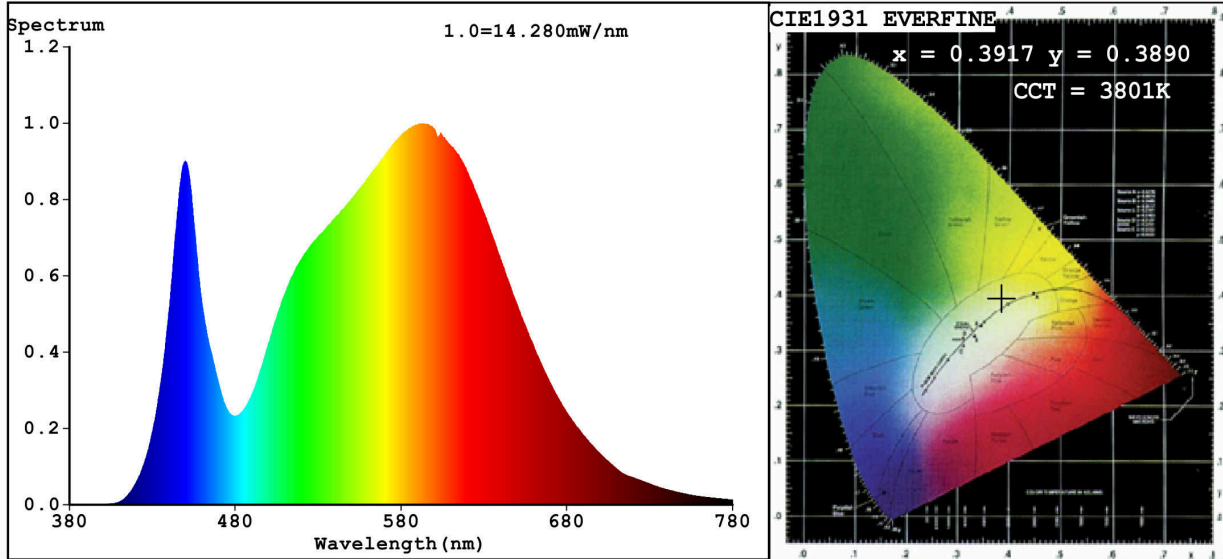

Color Parameters:

Chromaticity Coordinate: $x=0.3917$ $y=0.3890$ / $u'=0.2276$ $v'=0.5085$

CCT=3801K(Duv=0.0025) Dominant WL:Ld =578.7nm Purity=34.3%

Ratio:R=18.5% G=78.4% B=3.0%; Peak WL:Lp=593.8nm FWHM=146.7nm

Render Index:Ra=81.0

R1 =79	R2 =86	R3 =93	R4 =81	R5 =79	R6 =82	R7 =86
R8 =63	R9 =3	R10=68	R11=79	R12=60	R13=80	R14=96
						R15=72

Photo Parameters:

Flux = 814.6 lm Eff. : 60.86 lm/W Fe = 2.428 W

Electrical parameters:

V = 229.99 V I = 0.1065 A P = 13.38 W PF = 0.5462

WHITE:ANSI_4000K

Status: Integral T = 54 ms Ip = 49421 (75%)

Model:LED PANELS ROUND/12W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:99LED972
Date:2019-07-05 15:40
Humidity:65.0%
Remarks:W1119X021_5736