

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99LED973WW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 350 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	18,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,445 0,404	
Parameters for directional light sources:				
Peak luminous intensity (cd)	399	Beam angle in degrees, or the range of beam angles that can be set	112	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

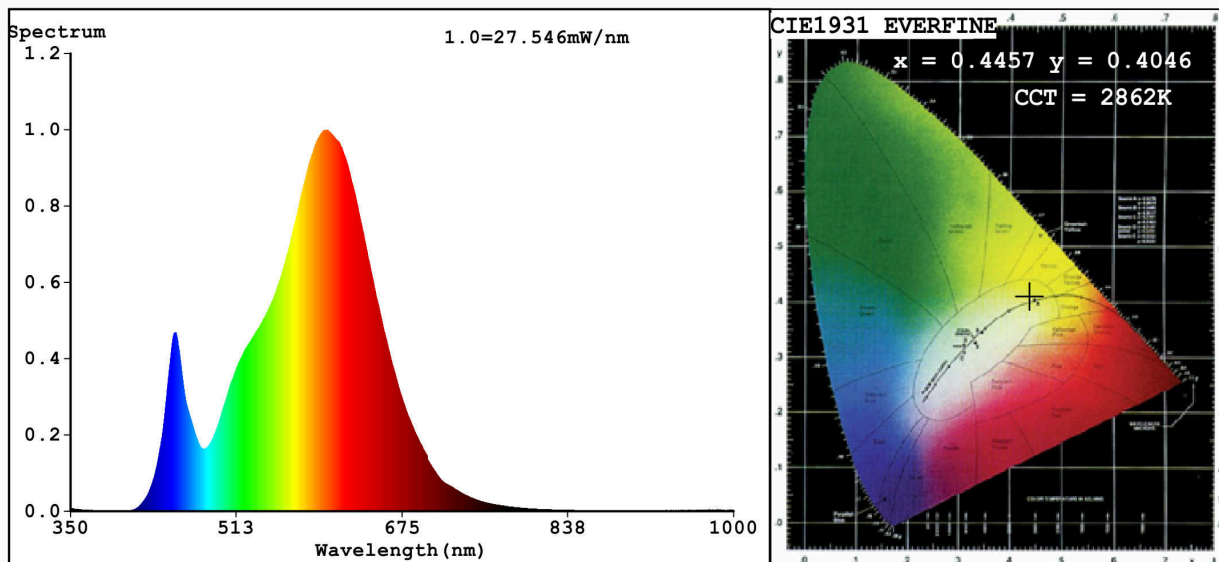

Color Parameters:

Chromaticity Coordinate: $x=0.4457$ $y=0.4046$ $u'=0.2560$ $v'=0.5229$
 CCT=2862K (Duv=-0.0009) Dominant WL:Ld =583.7nm WL:Lc = --nm Purity=55.2%
 Ratio:R=23.5% G=74.2% B=2.3%; Peak WL:Lp=602.1nm FWHM=116.8nm
 Render Index:Ra=80.3

R1 =78 R2 =90 R3 =95 R4 =77 R5 =79 R6 =88 R7 =80
 R8 =54 R9 =0 R10=78 R11=76 R12=70 R13=81 R14=98 R15=71

Photo Parameters:

Flux = 1297 lm Eff. : 68.65 lm/W Fe = 3.921 W

Electrical parameters:

V = 229.95 V I = 0.1496 A P = 18.90 W PF = 0.5493
 WHITE:ANSI_2700K

Status: Integral T = 30 ms Ip = 44986 (69%)

Model:LED PANEL ROUND/18W
 Tester:Petya Marinova
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99LED973WW
 Date:2019-07-24 13:25:45
 Humidity:65.0%
 Remarks:W1119X021-2_5736