

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99PFM1505040/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	50,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,382 0,385	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,70	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :

Temperature :65'C


Operator :admin

Remark:

Manufacturer :BOHUA

Humidity :65%

Test Date :2022-05-28 13:21:29

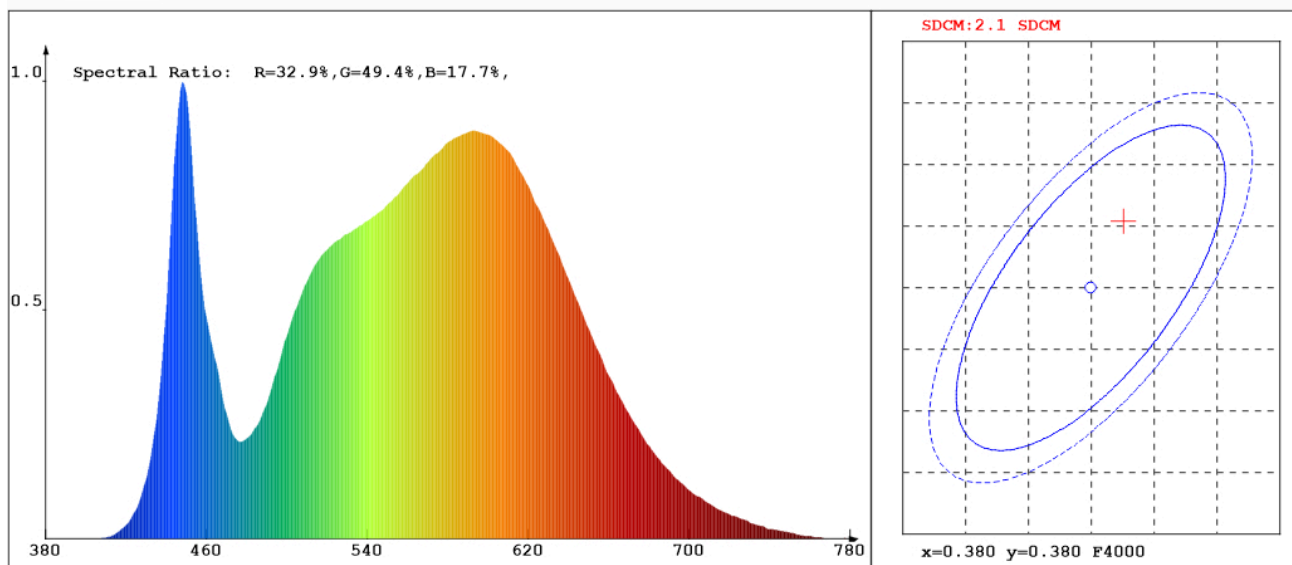

Chroma Parameters

Chro.Coar.:x=0.3826 y=0.3854 u=0.2231 v=0.3371 duv=0.0034

CCT: 4005K Dominant Wave.:577.4nm Purity:30.5%

Flux RGB Ratio:R=18.0%,G=79.9%,B=2.1% Peak Wave:448.5nm Half Width:19.2nm

Rendering Index:Ra= 82.2

R1 =80 R2 =87 R3 =94 R4 =83 R5 =80 R6 =83 R7 =87 R8 =64

R9 =5 R10=70 R11=82 R12=60 R13=81 R14=97 R15=73

Photo Parameters

Flux:5220.79lm

Effi.:103.6lm/W

Radiant:7451.4mW

Iv:0.0mcd

Efficiency:0.131

Effi Level:A+ (EU 874-2012)

Ele. Parameters

Voltage:U=229.000V

Current:I=0.2280A

Power:P=50.36W

Power Factor:PF=0.961

Lamp Parameters

Voltage:U=0.000V

Current:I=0.0000A

Power:P=0.00W

Power Factor:PF=1.000

Efficacy:0.0lm/W

Instrument state

Instrument:Hopoo HP8000

Integral Time: 75.356ms

VPeak: 14954

VDark: 1081

Product ID: 201306373