

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99PFM602440/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 500 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	23,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,381 0,383	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;


(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :
 Temperature :65'C
 Operator :admin
 Remark:

Manufacturer :BOHUA
 Humidity :65%
 Test Date :2022-05-28 13:24:54

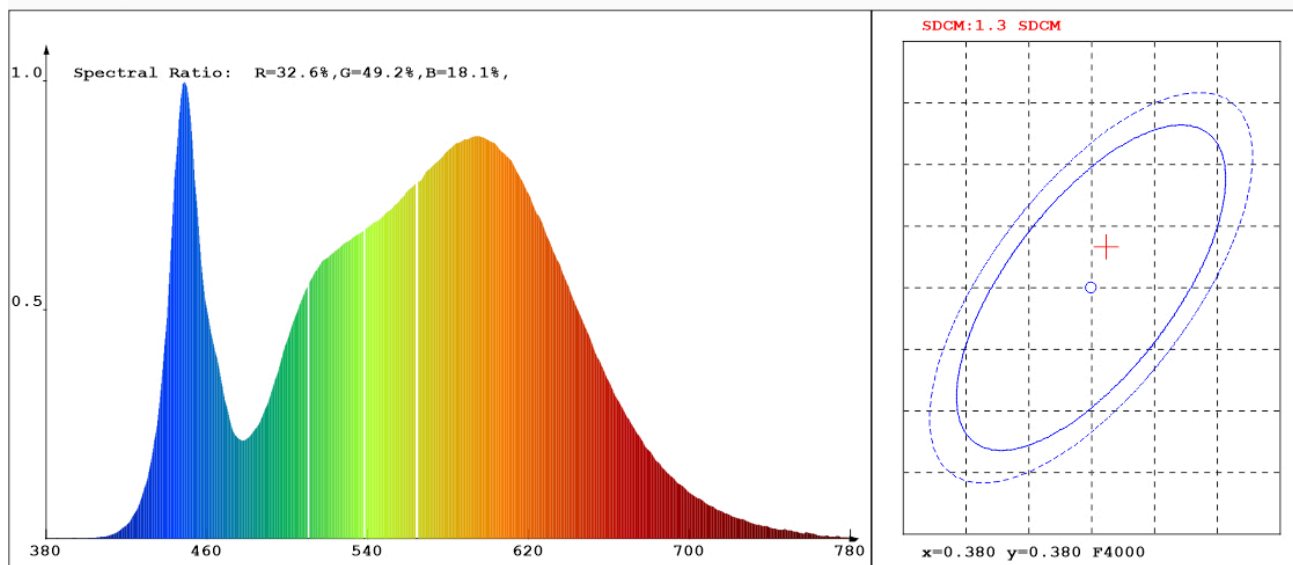

Chroma Parameters

Chro.Coar.:x=0.3812 y=0.3833 u=0.2230 v=0.3363 duv=0.0028
 CCT: 4028K Dominant Wave.:577.5nm Purity:29.4%
 Flux RGB Ratio:R=18.0%,G=79.9%,B=2.1% Peak Wave:448.5nm Half Width:19.4nm

Rendering Index:Ra= 82.2

R1 =80	R2 =87	R3 =94	R4 =82	R5 =81	R6 =83	R7 =86	R8 =64
R9 =4	R10=71	R11=82	R12=60	R13=82	R14=97	R15=73	

Photo Parameters

Flux:2575.79lm Effi.:108.3lm/W Radiant:6897.1mW Iv:0.0mcd
 Efficiency:0.126 Effi Level:A+ (EU 874-2012)

Ele. Parameters

Voltage:U=230.100V Current:I=0.1060A
 Power:P=23.77W Power Factor:PF=0.968

Lamp Parameters

Voltage:U=0.000V Current:I=0.0000A Power:P=0.00W
 Power Factor:PF=1.000 Efficacy:0.0lm/W

Instrument state

Instrument:Hopoo HP8000 Integral Time: 75.356ms VPeak: 14490
 VDark: 1229 Product ID: 201306373