

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99POM1505040/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 500 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	49,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,378 0,377	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	0,70	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;


(b) '-': not applicable;

LED Test Report

Product Mark

Product Type :
 Temperature :65'C
 Operator :admin
 Remark:

Manufacturer :BOHUA
 Humidity :65%
 Test Date :2022-05-12 11:17:57

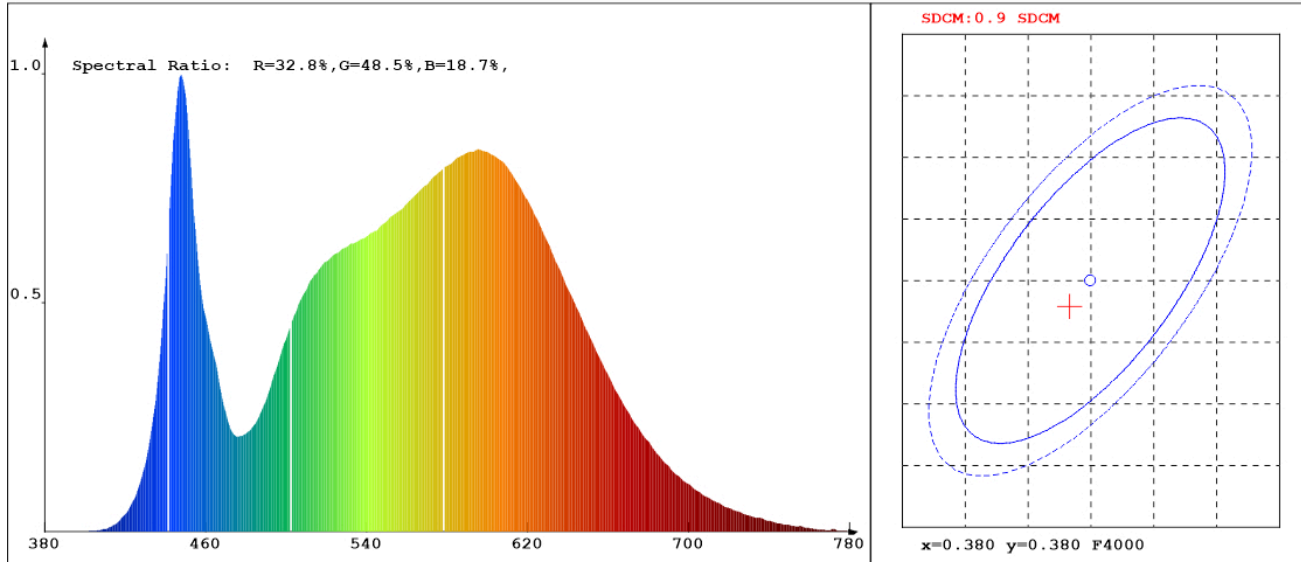

Chroma Parameters

Chro.Coar.:x=0.3783 y=0.3779 u=0.2233 v=0.3345 duv=0.0012
 CCT: 4067K Dominant Wave.:578.2nm Purity:27.0%
 Flux RGB Ratio:R=18.1%,G=79.7%,B=2.2% Peak Wave:447.5nm Half Width:19.2nm

Rendering Index:Ra= 83.4

R1 =82	R2 =88	R3 =93	R4 =84	R5 =82	R6 =84	R7 =87	R8 =67
R9 =11	R10=72	R11=84	R12=64	R13=83	R14=96	R15=76	

Photo Parameters

Flux:4495.90lm Effi.:90.5lm/W Radiant:11990.8mW Iv:0.0mcd
 Efficiency:0.151 Effi Level:A+ (EU 874-2012)

Ele. Parameters

Voltage:U=229.600V Current:I=0.2200A
 Power:P=49.68W Power Factor:PF=0.980

Lamp Parameters

Voltage:U=0.000V Current:I=0.0000A Power:P=0.00W
 Power Factor:PF=1.000 Efficacy:0.0lm/W

Instrument state

Instrument:Hopoo HP8000 Integral Time: 41.798ms VPeak: 15130
 VDark: 1338 Product ID: 201306373