

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99RING10004075/GR

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	7 000 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	75,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	1 000	Spectral power distribution in the
	Width	1 000	
	Depth	25	
			See image in last page

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,378 0,379
Parameters for directional light sources:				
Peak luminous intensity (cd)	450		Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:				
R9 colour rendering index value	7		Survival factor	0,50
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80		Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

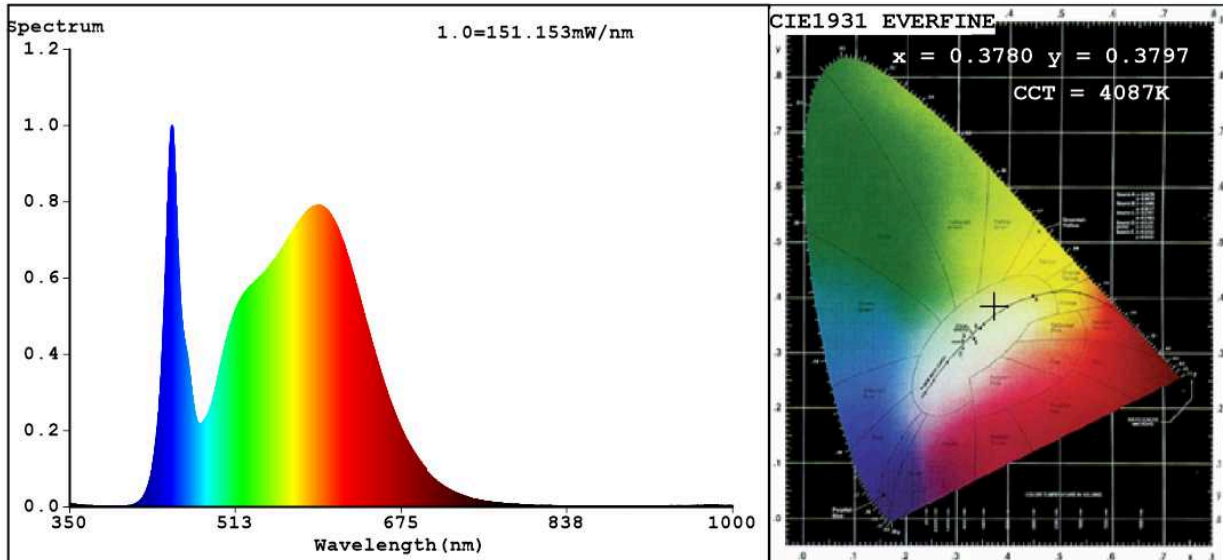

Color Parameters:

Chromaticity Coordinate: $x=0.3780$ $y=0.3797$ / $u'=0.2224$ $v'=0.5025$
 CCT=4087K (Duv=0.0021) Dominant WL:Ld =577.6nm WL:Lc = --nm Purity=27.4%
 Ratio:R=17.9% G=78.5% B=3.6%; Peak WL:Lp=450.6nm FWHM=17.7nm
 Render Index:Ra=82.9 AvgR=76.0 TM30:Rf=84 Rg=95 Lav=568.2nm

R1 =81	R2 =89	R3 =95	R4 =82	R5 =81	R6 =84	R7 =87	
R8 =65	R9 =7	R10=73	R11=82	R12=60	R13=83	R14=97	R15=75

Photo Parameters:

Flux = 7003 lm Eff. : 92.62 lm/W Fe = 21.12 W

Electrical parameters:

V = 225.16 V I = 0.3955 A P = 75.60 W PF = 0.8490

WHITE:ANSI_4000K

Status: Integral T = 9 ms Ip = 51752 (79%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99RING10004075
 Date:2021-12-20 15:01:59
 Humidity:65.0%
 Remarks: