

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99RING10004075/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	7 000 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	75,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,378 0,379	
Parameters for directional light sources:				
Peak luminous intensity (cd)	450	Beam angle in degrees, or the range of beam angles that can be set	90	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	7	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

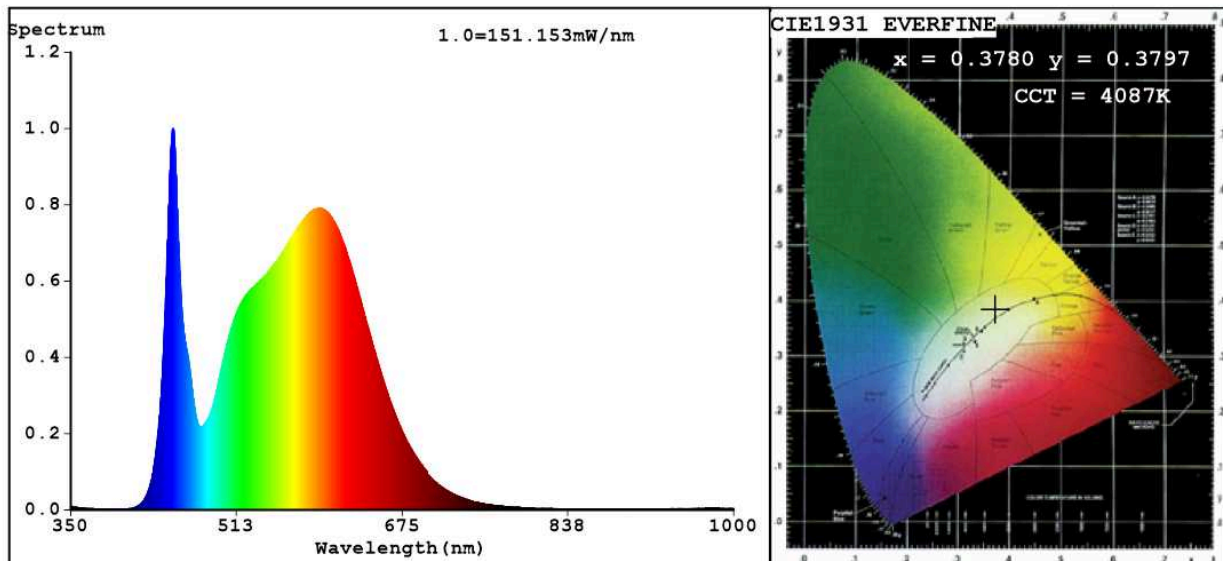

Color Parameters:

Chromaticity Coordinate: $x=0.3780$ $y=0.3797$ $u'=0.2224$ $v'=0.5025$
 CCT=4087K (Duv=0.0021) Dominant WL: $L_d = 577.6nm$ WL: $L_c = --nm$ Purity=27.4%
 Ratio: R=17.9% G=78.5% B=3.6% Peak WL: $L_p = 450.6nm$ FWHM=17.7nm
 Render Index: $R_a = 82.9$ AvgR=76.0 TM30: $R_f = 84$ $R_g = 95$ $L_{av} = 568.2nm$

R1 =81	R2 =89	R3 =95	R4 =82	R5 =81	R6 =84	R7 =87
R8 =65	R9 =7	R10=73	R11=82	R12=60	R13=83	R14=97
						R15=75

Photo Parameters:

Flux = 7003 lm Eff. : 92.62 lm/W $F_e = 21.12 W$

Electrical parameters:

V = 225.16 V I = 0.3955 A P = 75.60 W PF = 0.8490

WHITE: ANSI_4000K

Status: Integral T = 9 ms $I_p = 51752$ (79%)

Model: LED INDOOR LIGHTING
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99RING10004075
 Date: 2021-12-20 15:01:59
 Humidity: 65.0%
 Remarks: