

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99RING6004035/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	35	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 715 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	37,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,375 0,374	
Parameters for directional light sources:				
Peak luminous intensity (cd)	450	Beam angle in degrees, or the range of beam angles that can be set	90	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	14	Survival factor	0,00	
the lumen maintenance factor	0,00			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,60	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

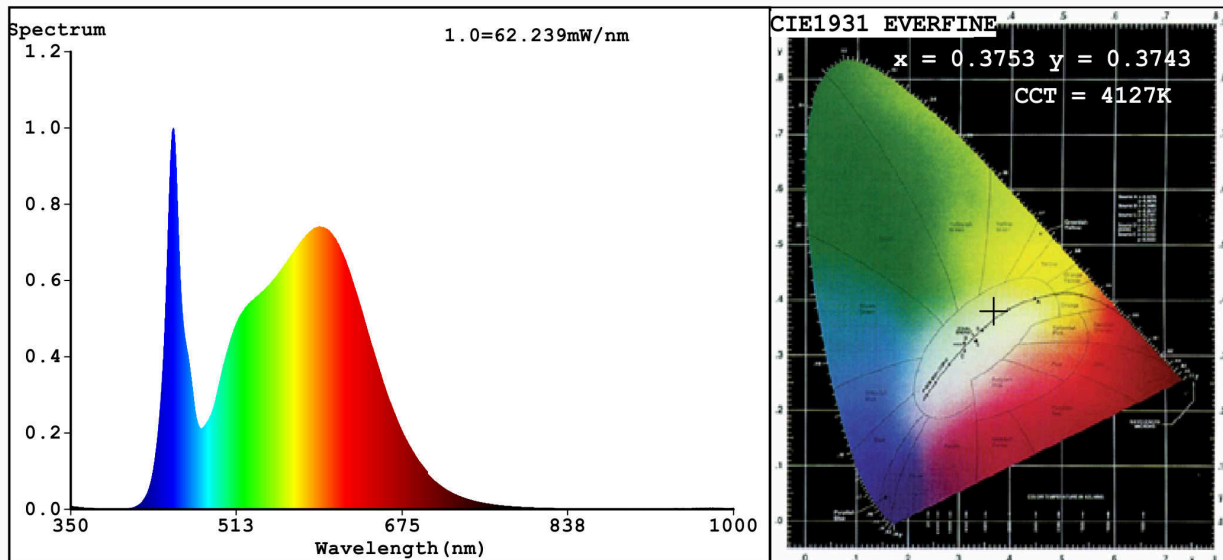

Color Parameters:

Chromaticity Coordinate: $x=0.3753$ $y=0.3743$ $u'=0.2227$ $v'=0.4997$
 CCT=4127K (Duv=0.0004) Dominant WL:Ld =578.3nm WL:Lc = --nm Purity=24.9%
 Ratio:R=18.1% G=78.2% B=3.7%; Peak WL:Lp=450.6nm FWHM=17.5nm
 Render Index:Ra=84.2 AvgR=77.8 TM30:Rf=85 Rg=96 Lav=567.9nm

R1 =83	R2 =90	R3 =95	R4 =84	R5 =83	R6 =85	R7 =87
R8 =67	R9 =14	R10=76	R11=83	R12=61	R13=85	R14=97 R15=77

Photo Parameters:

Flux = 2715 lm Eff. : 72.85 lm/W Fe = 8.320 W

Electrical parameters:

V = 225.10 V I = 0.2474 A P = 37.27 W PF = 0.6691

WHITE:ANSI_4000K

Status: Integral T = 17 ms Ip = 44279 (68%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99RING6004035 BL
 Date:2021-10-21 13:51:23
 Humidity:65.0%
 Remarks: