

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99RING8004060/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	42	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 890 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	38,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without separate control gear, lighting control	Height	800	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	800	
	Depth	25	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,376 0,377
Parameters for directional light sources:			
Peak luminous intensity (cd)	451	Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:			
R9 colour rendering index value	14	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,2

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

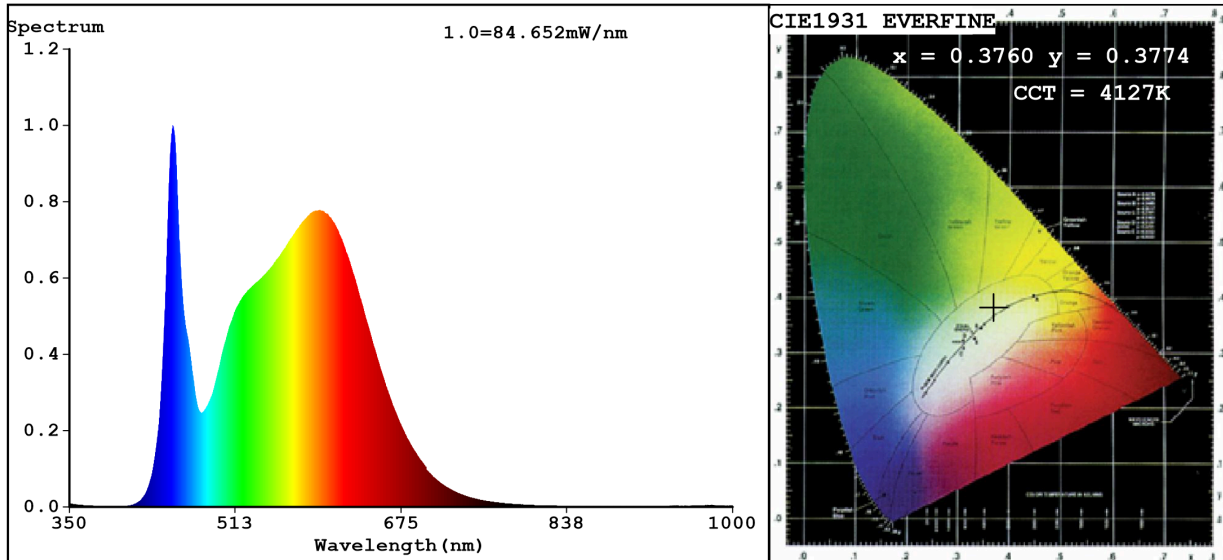

Color Parameters:

Chromaticity Coordinate: $x=0.3760$ $y=0.3774$ / $u'=0.2219$ $v'=0.5012$
 CCT=4127K (Duv=0.0016) Dominant WL:Ld =577.7nm WL:Lc = --nm Purity=26.1%
 Ratio:R=18.0% G=78.1% B=3.8% ; Peak WL:Lp=451.3nm FWHM=19.3nm
 Render Index:Ra=84.4

R1 =83 R2 =90 R3 =96 R4 =83 R5 =83 R6 =86 R7 =87
 R8 =67 R9 =14 R10=77 R11=83 R12=61 R13=85 R14=98 R15=77

Photo Parameters:

Flux = 3879 lm Eff. : 100.37 lm/W Fe = 11.85 W

Electrical parameters:

V = 229.90 V I = 0.1739 A P = 38.65 W PF = 0.9664

WHITE:ANSI_4000K

Status: Integral T = 15 ms Ip = 52532 (80%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99RING8004060/GR
 Date:2022-10-19 10:44:47
 Humidity:65.0%
 Remarks: