

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99SM1204040/GR

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	41,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,375 0,378	
Parameters for directional light sources:				
Peak luminous intensity (cd)	453	Beam angle in degrees, or the range of beam angles that can be set	90	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

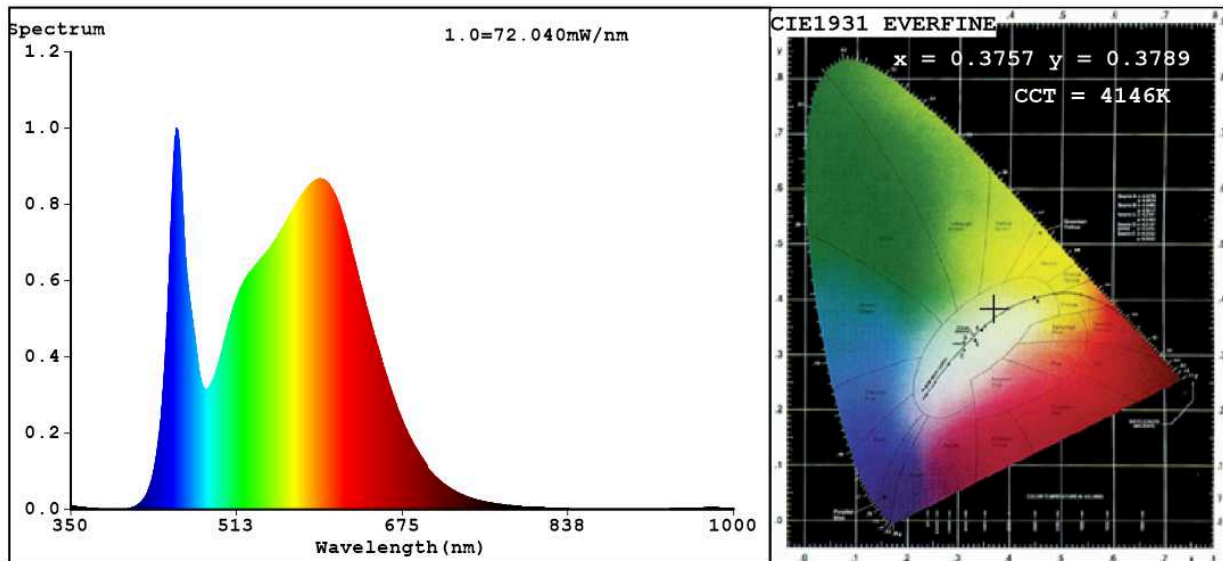

Color Parameters:

Chromaticity Coordinate: $x=0.3757$ $y=0.3789$ $u'=0.2211$ $v'=0.5018$
 CCT=4146K (Duv=0.0024) Dominant WL: $L_d = 577.1nm$ WL: $L_c = --nm$ Purity=26.5%
 Ratio: R=17.8% G=78.1% B=4.1%; Peak WL: $L_p = 453.7nm$ FWHM=24.5nm
 Render Index: $R_a = 83.6$ AvgR=77.0 TM30: $R_f = 84$ $R_g = 93$ $L_{av} = 567.6nm$

R1 =82	R2 =91	R3 =96	R4 =81	R5 =82	R6 =87	R7 =86
R8 =64	R9 =9	R10=78	R11=80	R12=60	R13=85	R14=98 R15=75

Photo Parameters:

Flux = 3652 lm Eff. : 87.10 lm/W $F_e = 11.12 W$

Electrical parameters:

V = 225.18 V I = 0.2641 A P = 41.93 W PF = 0.7051
 WHITE: ANSI_4000K

Status: Integral T = 16 ms $I_p = 44894 (69\%)$

Model: LED INDOOR LIGHTING
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 99SM1204040 WH
 Date: 2021-12-23 09:53:13
 Humidity: 65.0%
 Remarks: