

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99SM1504050/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value	
<b>General product parameters:</b>				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	G	
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 500 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000	
On-mode power ( $P_{on}$ ), expressed in W	47,3	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00	
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83	
Outer dimensions without	Height	Spectral power distribution in the	See image in last page	
	Width			1 500
	Depth			70
			48	

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,376 0,379
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	453		Beam angle in degrees, or the range of beam angles that can be set	90
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	8		Survival factor	0,50
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,70		Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

**Spectrum Test Report**

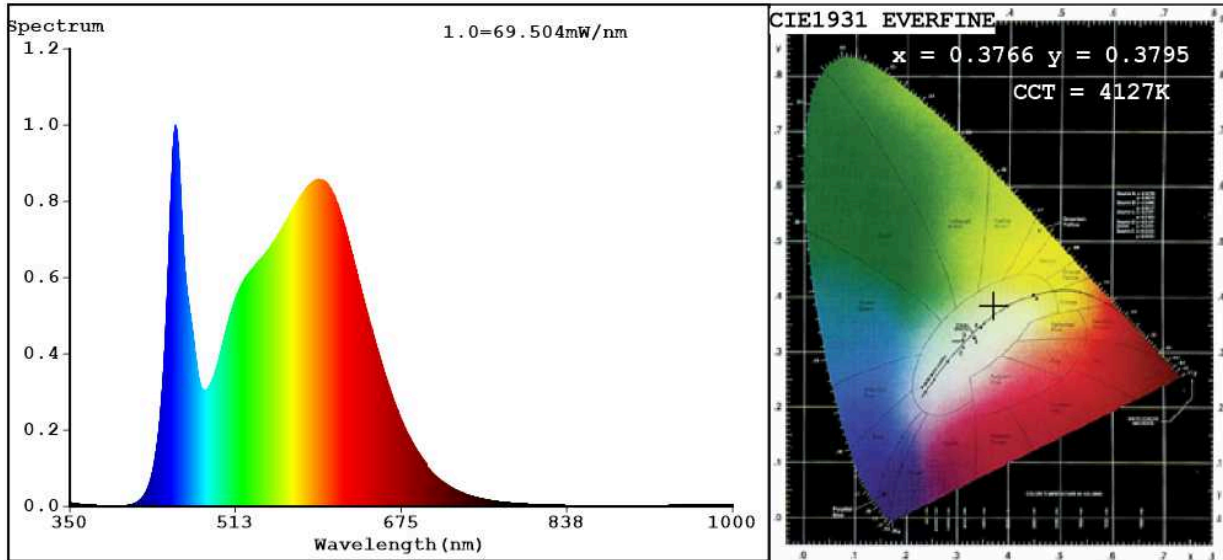

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3766$   $y=0.3795$  /  $u'=0.2215$   $v'=0.5022$   
 CCT=4127K (Duv=0.0025) Dominant WL:Ld =577.2nm WL:Lc = --nm Purity=26.9%  
 Ratio:R=17.9% G=78.1% B=4.0% ; Peak WL:Lp=453.7nm FWHM=23.7nm  
 Render Index:Ra=83.5 AvgR=76.8 TM30:Rf=84 Rg=93 Lav=567.8nm

R1 =82    R2 =91    R3 =96    R4 =81    R5 =82    R6 =87    R7 =86  
 R8 =64    R9 =8    R10=78    R11=80    R12=60    R13=84    R14=98    R15=75

**Photo Parameters:**

Flux = 3475 lm    Eff. : 73.46 lm/W    Fe = 10.55 W

**Electrical parameters:**

V = 225.12 V    I = 0.2810 A    P = 47.30 W PF = 0.7477  
 WHITE:ANSI\_4000K

Status: Integral T = 16 ms    Ip = 43119 (66%)

Model:LED INDOOR LIGHTING  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number: 99SM1504050 BL  
 Date:2021-12-23 10:04:17  
 Humidity:65.0%  
 Remarks: