

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 99SM36S4020/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	25,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,380 0,376	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	451	Beam angle in degrees, or the range of beam angles that can be set	90	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	26	Survival factor	0,50	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

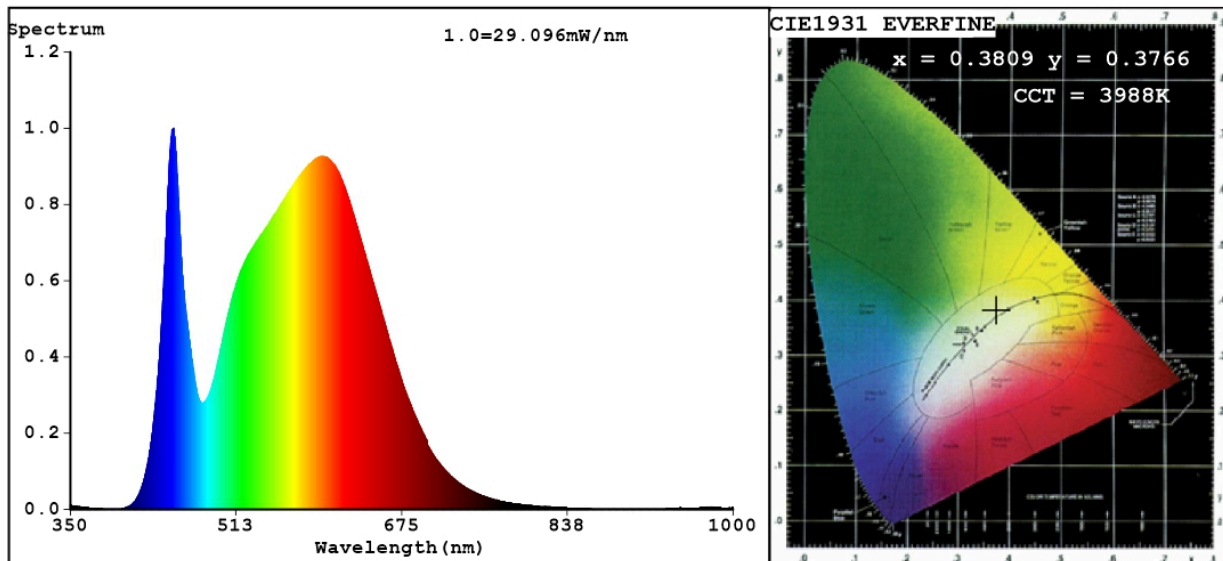

### Color Parameters:

Chromaticity Coordinate:  $x=0.3809$   $y=0.3766$   $u'=0.2254$   $v'=0.5016$   
 CCT=3988K (Duv=-0.0002) Dominant WL:Ld =579.2nm WL:Lc = --nm Purity=27.3%  
 Ratio:R=18.7% G=77.7% B=3.6%; Peak WL:Lp=451.3nm FWHM=24.5nm  
 Render Index:Ra=85.4 AvgR=79.7 TM30:Rf=86 Rg=97 Lav=572.9nm

R1 =84	R2 =90	R3 =94	R4 =85	R5 =84	R6 =86	R7 =89
R8 =71	R9 =26	R10=76	R11=84	R12=65	R13=86	R14=96 R15=80

### Photo Parameters:

Flux = 1599 lm Eff. : 63.67 lm/W Fe = 5.082 W

### Electrical parameters:

V = 225.09 V I = 0.2166 A P = 25.12 W PF = 0.5151

WHITE:ANSI\_4000K

Status: Integral T = 38 ms Ip = 50038 (76%)

Model:LED INDOOR LIGHTING  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:99SM36S4020 WH1  
 Date:2022-02-01 14:24:44  
 Humidity:65.0%  
 Remarks: