

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99SM604020/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	25,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,376 0,379
Parameters for directional light sources:				
Peak luminous intensity (cd)	452		Beam angle in degrees, or the range of beam angles that can be set	90
Parameters for LED and OLED light sources:				
R9 colour rendering index value	6		Survival factor	0,50
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50		Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

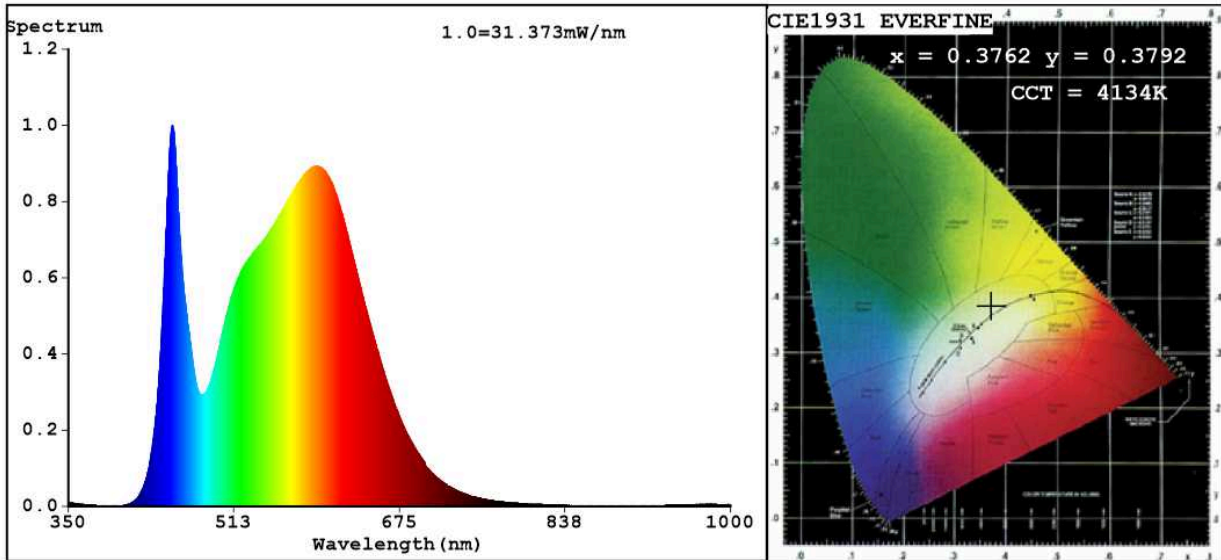

Color Parameters:

Chromaticity Coordinate: $x=0.3762$ $y=0.3792$ / $u'=0.2214$ $v'=0.5020$
 CCT=4134K (Duv=0.0024) Dominant WL:Ld =577.2nm WL:Lc = --nm Purity=26.7%
 Ratio:R=17.7% G=78.5% B=3.8%; Peak WL:Lp=452.0nm FWHM=24.0nm
 Render Index:Ra=82.8 AvgR=75.8 TM30:Rf=84 Rg=94 Lav=567.6nm

R1 =81 R2 =89 R3 =95 R4 =81 R5 =81 R6 =85 R7 =86
 R8 =64 R9 =6 R10=75 R11=80 R12=60 R13=83 R14=98 R15=74

Photo Parameters:

Flux = 1638 lm Eff. : 65.44 lm/W Fe = 4.963 W

Electrical parameters:

V = 225.17 V I = 0.2192 A P = 25.03 W PF = 0.5071

WHITE:ANSI_4000K

Status: Integral T = 37 ms Ip = 51007 (78%)

Model:LED INDOOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number: 99SM604020 BL
 Date:2021-12-23 10:13:57
 Humidity:65.0%
 Remarks: