

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED314

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	500 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	600
On-mode power (P_{on}), expressed in W	9,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	79
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,277 0,274	
Parameters for directional light sources:				
Peak luminous intensity (cd)	450	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	15	Survival factor	1,00	
the lumen maintenance factor	1,00			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	1,00	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

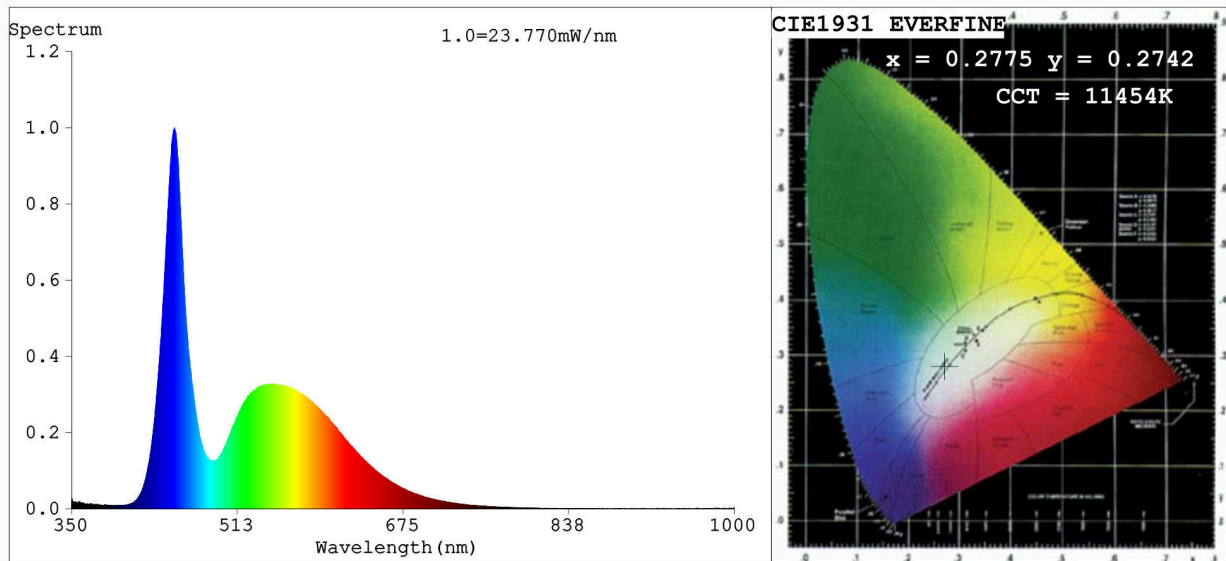

Color Parameters:

Chromaticity Coordinate: $x=0.2775$ $y=0.2742$ $u'=0.1935$ $v'=0.4303$
 $CCT=11454K$ ($Duv=-0.0056$) Dominant WL: $L_d=475.9nm$ WL: $L_c = --nm$ Purity=24.6%
 Ratio: R=11.4% G=82.3% B=6.3% Peak WL: $L_p=450.7nm$ FWHM=23.7nm
 Render Index: $R_a=79.8$ $AvgR=72.1$

R1 =81	R2 =82	R3 =76	R4 =83	R5 =81	R6 =72	R7 =87
R8 =77	R9 =15	R10=51	R11=81	R12=46	R13=82	R14=86
						R15=82

Photo Parameters:

Flux = 473.3 lm Eff. : 52.65 lm/W Fe = 1.722 W

Electrical parameters:

V = 11.999 V I = 0.7492 A P = 8.990 W PF = 1.000

Status: Integral T = 718 ms Ip = 44658 (68%)

Model : LED 600 / 300 STELLAR

Tester:

Temperature: 25.3Deg

Manufacturer:

Number: 99XLED314

Date: 2021-07-14 10:30:47

Humidity: 65.0%

Remarks: