

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED621E

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	24,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,443 0,407	
Parameters for directional light sources:				
Peak luminous intensity (cd)	601	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,00	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

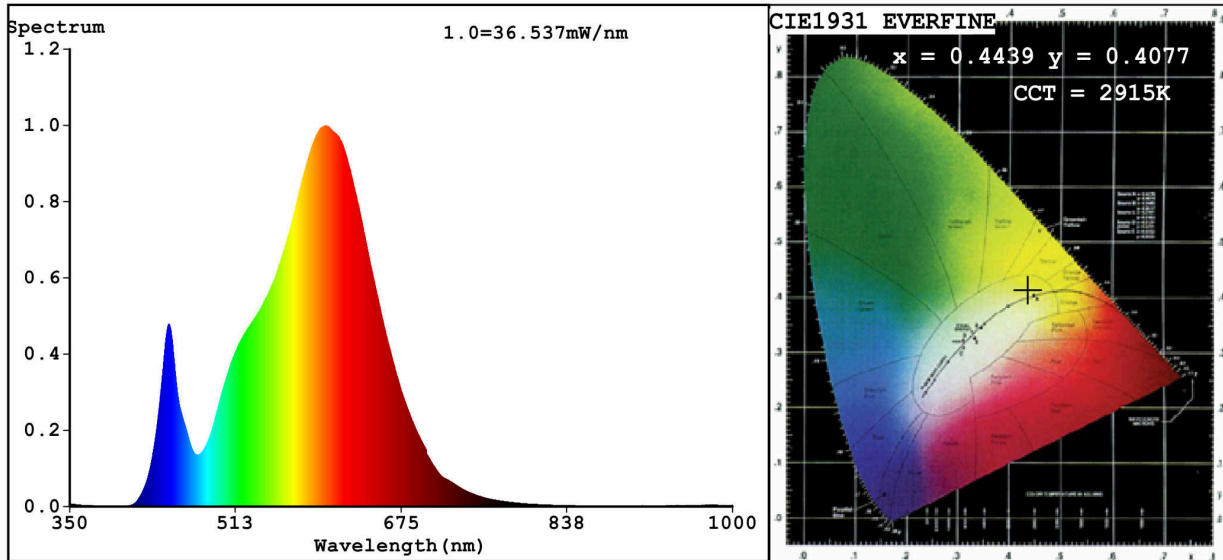

Color Parameters:

Chromaticity Coordinate: $x=0.4439$ $y=0.4077$ / $u'=0.2535$ $v'=0.5239$
 CCT=2915K (Duv=0.0005) Dominant WL: $L_d = 583.0\text{nm}$ WL: $L_c = \text{--nm}$ Purity=55.6%
 Ratio: R=23.1% G=74.7% B=2.2% ; Peak WL: $L_p = 601.1\text{nm}$ FWHM=123.5nm
 Render Index: $R_a = 81.0$

R1 =79 R2 =89 R3 =97 R4 =80 R5 =79 R6 =87 R7 =82
 R8 =56 R9 =0 R10=75 R11=79 R12=71 R13=81 R14=99 R15=71

Photo Parameters:

Flux = 1764 lm Eff. : 72.03 lm/W $P_e = 5.318$ W

Electrical parameters:

V = 220.04 V I = 0.2185 A P = 24.49 W PF = 0.5095
 WHITE:ANSI_3000K

Status: Integral T = 29 ms $I_p = 50046$ (76%)

Model:LED PANEL ROUND
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99XLED621
 Date:2021-01-14 11:11:09
 Humidity:65.0%
 Remarks:7293