

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 99XLED622E

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	18,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,390 0,383	
Parameters for directional light sources:				
Peak luminous intensity (cd)	591	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	1	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,6	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

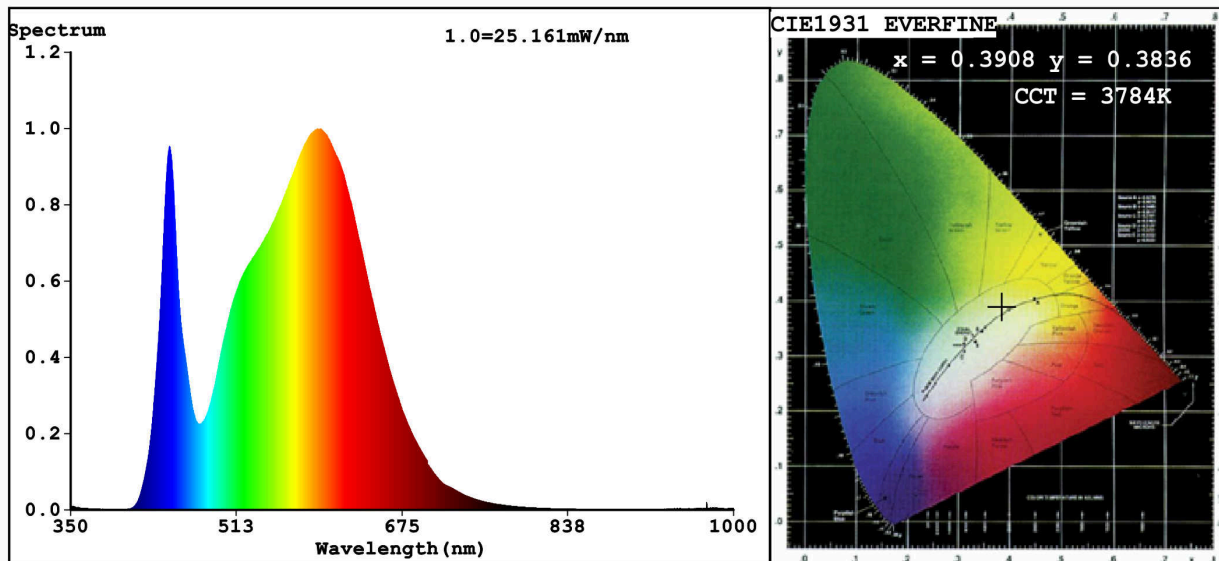

Color Parameters:

Chromaticity Coordinate: $x=0.3908$ $y=0.3836$ $u'=0.2291$ $v'=0.5061$
 CCT=3784K (Duv=0.0003) Dominant WL: $\lambda_d = 579.7\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=32.4%
 Ratio: R=18.7% G=78.1% B=3.1%; Peak WL: $\lambda_p = 591.8\text{nm}$ FWHM=145.5nm
 Render Index: $R_a = 81.3$

R1 =79	R2 =87	R3 =94	R4 =81	R5 =80	R6 =83	R7 =85
R8 =62	R9 =1	R10=70	R11=80	R12=65	R13=81	R14=97
						R15=72

Photo Parameters:

Flux = 1402 lm Eff. : 75.55 lm/W $P_e = 4.225\text{ W}$

Electrical parameters:

V = 219.98 V I = 0.1653 A P = 18.55 W PF = 0.5104
 WHITE:ANSI_4000K

Status: Integral T = 37 ms $I_p = 45339$ (69%)

Model:LED PANEL ROUND OM
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:99XLED622
 Date:2021-01-14 10:44:50
 Humidity:65.0%
 Remarks:7293